



Scan code to know more ( 扫码了解更多 )

河北深泽嘉美网印器材有限公司

地址：中国河北省石家庄市深泽县南白庄

手机：86-18631122850

网址：<https://www.jiameiscreen.com>

Shenze Jiamei Screen Printing Equipment Co.,Ltd.

Address: Nanbaizhuang Village, Shenze County, Shijiazhuang City,  
Hebei province, China

Mobile: 86-18631122850

Websile: [www.jiameiscreen.com](http://www.jiameiscreen.com)



**河北深泽嘉美网印器材有限公司**

HEBEI SHENZE JIAMEI SCREEN PRINTING EQUIPMENT CO.,LTD.

Digital Technology

—— DTF/UV DTF ——



Walk into DTF

As the name implies, DTF means to print patterns directly onto PET film and transfer these pattern designs to clothing. It is a new printing technology that is different from the traditional screen printing process. It does not require plate making, and DTF printer can easily and quickly obtain various colors, saving labor costs to a greater extent and reducing re-source usage.

Features such as avoid hollowing, waste-free, green and pollution-free are popular in the printing market. At present, white ink heat transfer has spread all over the corners of various countries.



Four-head net cleaning unit powder shaker




技术参数/TECHNICAL SPECIFICATION

| Powder Shaker Machine                    |                                                                                                                             |
|------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|
| Printing Width                           | 0-600mm                                                                                                                     |
| Power voltage/Rated power                | 220V/6500w                                                                                                                  |
| Decontamination function                 | Built-in purifier,save space;Separate warehouse design, easy filter replacement                                             |
| Manual/automatic toner recovery function | Manual/Automatic Optional;Part of the dusting boxes can be split off; Automatic powder circulation without manual operation |
| Rewinding function                       | Film take-up automatically                                                                                                  |
| Mesh belt                                | With adsorption function induction type adaptive printing speed rotation                                                    |
| Control system                           | Touch screen intelligent control, one click to switch between Chinese and English                                           |
| Machine size                             | 1880*910*1100mm/230KG                                                                                                       |
| Packing Size/Weight                      | 2000*1030*1220mm/350kg                                                                                                      |

细节展示/MACHINE DETAILS




Manual/automatic toner recovery function

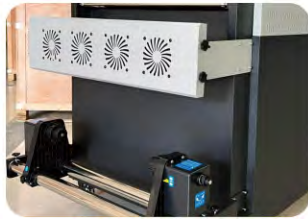

Fan cooling



Control system

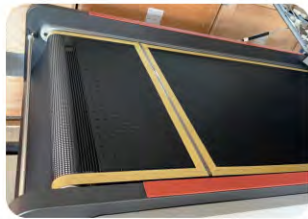


Mesh belt

产品特点/MACHINE FEATURES

- 1. Wide Compatibility: Supports 0-600mm print width for diverse printing applications.
- 2. Space-Saving Purification: Built-in purifier with independent compartments for effortless filter replacement.
- 3. High Automation: Features automatic film retraction and manual/auto powder return to boost efficiency.
- 4. Intuitive Control: Touchscreen interface enables one-touch Chinese/English switching for seamless operation.



## 24" DTF printer with 4 i3200 heads, with powder shaker with belt

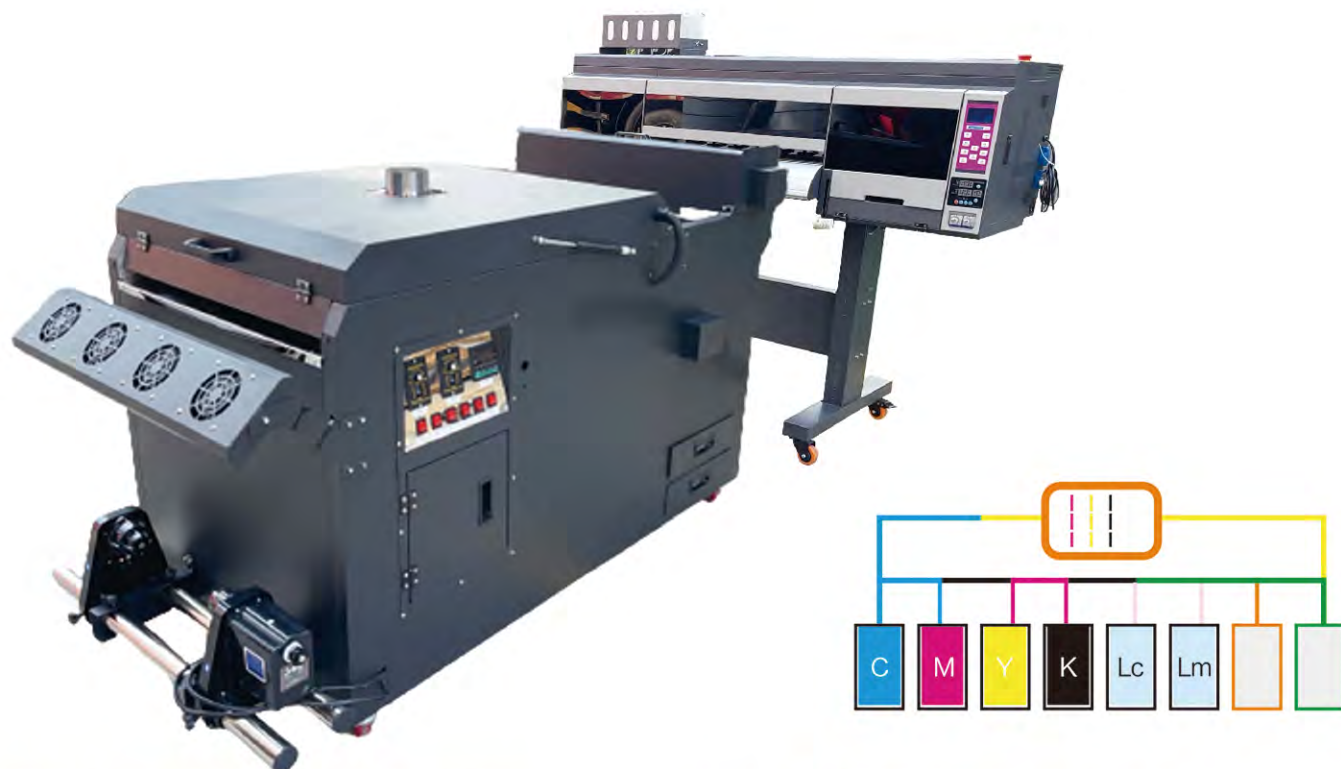

### 技术参数/TECHNICAL SPECIFICATION

| 4 Heads 60cm DTF Printer |                                                                                 |
|--------------------------|---------------------------------------------------------------------------------|
| Print Head               | Epson i3200/4720                                                                |
| Number of Print Head     | 4                                                                               |
| Maximum Printing Width   | 620mm                                                                           |
| RIP Software             | Maintop 6.1/ Photo print                                                        |
| Motherboard              | Hoson                                                                           |
| Language                 | Chinese / English                                                               |
| Print Speed              | 4Pass:28m <sup>2</sup> /h, 6Pass:21m <sup>2</sup> /h, 8Pass:14m <sup>2</sup> /h |
| Print Accuracy           | 360*2400dpi, 360*3600dpi, 720*2400dpi                                           |
| Environmental conditions | Temperature 20~28°C, Relative Humidity: 65%~75%                                 |
| Ink Type & Configuration | Textile Pigment Ink C/M/Y/K/Lc/Lm/W                                             |
| Heating Method           | Pre-heater, Printing bed heater, Rear heater 30~65°C                            |
| Working Power Supply     | 20v/110v, 50HZ/60HZ                                                             |
| Printer Powder           | Printer: 350w                                                                   |

| Conveyor Belt Powder Shaker Machine |                                                                                 |
|-------------------------------------|---------------------------------------------------------------------------------|
| Retract Medium Width                | 0~600mm                                                                         |
| Applicable Media                    | Nylon, Chemical Fiber, Cotton, Leather, Swimwear, Wetsuit, PVC, EVA, etc.       |
| Powder Control                      | Dusting Speed, Shaking speed, Curing Temperature                                |
| Heating & Drying Function           | Multi-stage Heating system, Drying, Cold air fan function                       |
| Rewind Function                     | Automatic Induction Winding                                                     |
| Feature                             | Air suction device, conveyor belt transmission medium                           |
| Print Speed                         | 4Pass:28m <sup>2</sup> /h, 6Pass:21m <sup>2</sup> /h, 8Pass:14m <sup>2</sup> /h |
| Package Size                        | 185*81*74cm 180KG    196*129*95cm 213KG                                         |

### 细节展示/MACHINE DETAILS



### 产品特点/MACHINE FEATURES

1. With 4 pcs of i3200 original print heads, for high speed working
2. White ink stirring and circulation, no sedimentation, ensure smooth printing
3. Easy to operate, printing, powder shaking and drying, All in one
4. Adopting automatic induction winding function, saving time, effort, and labor

## A1/60cm DTF printer with power shaker




### 技术参数/TECHNICAL SPECIFICATION

| A1 DTF printer                         |                                                                                                                       |
|----------------------------------------|-----------------------------------------------------------------------------------------------------------------------|
| Print head                             | i3200/XP600                                                                                                           |
| Head Qty                               | 2                                                                                                                     |
| The Maximum Print Width                | 600mm                                                                                                                 |
| Head Height                            | Adjustable height 0-12mm                                                                                              |
| Inks Type                              | Textile Pigment ink                                                                                                   |
| Document format                        | PDF, JPEG, TIFF                                                                                                       |
| Transmission Interface                 | Gigabit Network Port Transmission                                                                                     |
| Ink supply system                      | 1.5L Ink Bottle with Alarm Function+Secondary Continuous Ink Supply System+White Ink Agitate and Circulation          |
| Heating System                         | Shake Powder Machine Built-in Infrared Drying                                                                         |
| Voltage/Power                          | 220V/110V                                                                                                             |
| RIP Software                           | Maintop 6.1, PP, PF                                                                                                   |
| Machine Gross Weight                   | 113KG                                                                                                                 |
| Feeding System                         | 15R High Speed Single Head Feeding and Take Up System                                                                 |
| Printing speed                         | i3200: 6Pass 12m <sup>2</sup> /h 8Pass 8m <sup>2</sup> /h<br>XP600: 6Pass 9m <sup>2</sup> /h 8Pass 6m <sup>2</sup> /h |
| Shake Powder Machine Size/Gross Weight | 1100*900*1100mm/118KG                                                                                                 |
| Machine Size                           | 1655*750*1550mm/138KG                                                                                                 |
| Packing Size                           | 1730*830*670mm/163KG                                                                                                  |

| Powder Shaker Machine     |                                                                           |
|---------------------------|---------------------------------------------------------------------------|
| Retract Medium Width      | 0-600mm                                                                   |
| Applicable Media          | Nylon, Chemical Fiber, Cotton, Leather, Swimwear, Wetsuit, PVC, EVA, etc. |
| Powder Control            | Dusting Speed, Shaking speed, Curing Temperature                          |
| Heating & Drying Function | Multi-stage Heating system, Drying, Cold air fan function                 |
| Rewind Function           | Automatic Induction Winding                                               |

### 细节展示/MACHINE DETAILS

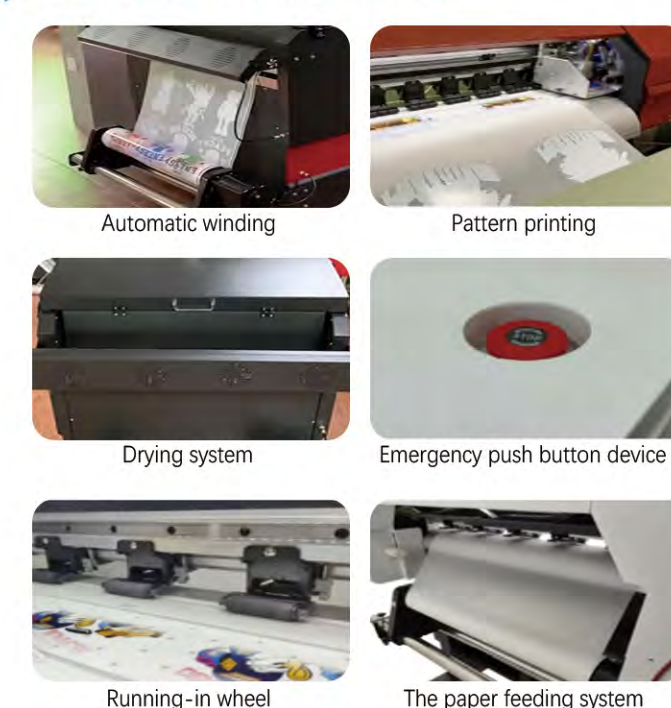

### 产品特点/MACHINE FEATURES

1. Hoson Print Heads Optional - i3200/XP600.
2. White ink stirring and circulation, no sedimentation, ensure smooth printing
3. Easy to operate, printing, powder shaking and drying, All in one
4. Adopting automatic induction winding function, saving time, effort, and labor



## A1/60cm DTF printer with four print heads

www.jiameiscreen.com



### DTF Pigment Ink



#### 技术参数/TECHNICAL SPECIFICATION

| A1 DTF Printer       |                                                                                                    |
|----------------------|----------------------------------------------------------------------------------------------------|
| Print head           | i3200/i1600/XP600                                                                                  |
| Number of print head | 4                                                                                                  |
| Maximum print width  | 650mm                                                                                              |
| Printing altitude    | 0-12mm                                                                                             |
| Compatible ink       | DTF ink                                                                                            |
| File format          | PDF, JPEG, TIFF                                                                                    |
| Printing media       | Digital printing film                                                                              |
| Printing interface   | Gigabyte network interface                                                                         |
| Printing speed       | i3200: 4Pass 28m/h 6Pass 22m/h<br>i1600: 4Pass 14m/h 6Pass 11m/h<br>XP600: 4Pass 19m/h 6Pass 16m/h |
| Voltage/Power        | 220V / 110V 450W                                                                                   |
| RIP Software         | Maintop, PP, RIIN                                                                                  |
| Printer size         | 1650*730*1550mm(140KG)                                                                             |
| Package size         | 1830*930*670mm (180KG)                                                                             |

#### Operating Environment

|                                    |                                                                                          |
|------------------------------------|------------------------------------------------------------------------------------------|
| Drying system                      | Heating B&A printing, Drying in Shake Powder Machine                                     |
| Powder shaking machine             | Four head net with automatic powder back touch screen intelligent powder shaking machine |
| Powder shaking machine Size/weight | 2000*9100*1130mm(230KG)<br>2100*1030*1230mm(303KG)                                       |

#### 细节展示/MACHINE DETAILS



Anti-collision device. To prevent the print head from being scratched or hit



Circuit Board. Using Hoson four headboard card, ultra-high stability



Power board. Adopt high quality integrated power supply board



Emergency push button device. In case of emergency, quick power failure



Aluminum capping station. The rise and fall are smooth and not wobbly



The paper feeding system is simple and easy to operate

#### 产品特点/MACHINE FEATURES

1. Hoson Print Heads Optional--i3200/i1600/XP600
2. White ink stirring and circulation, no sedimentation, ensure smooth printing
3. Easy to operate, printing, powder shaking and drying, All in one
4. Adopting automatic induction winding function, saving time, effort, and labor

Address: Nanbaizhuang Village, Shenzhe County, Shijiazhuang City, Hebei province, China



河北深泽嘉美网印器材有限公司  
HEBEI SHENZE JIAMEI SCREEN PRINTING EQUIPMENT CO., LTD.

## A3/33cm DTF printer with power shaker

### DTF Pigment Ink



#### 技术参数/TECHNICAL SPECIFICATION

| A3 DTF Printer         |                                                                                                              |
|------------------------|--------------------------------------------------------------------------------------------------------------|
| Print head             | XP600                                                                                                        |
| Head Qty               | 2                                                                                                            |
| RIP Software           | Maintop6.1, PP, PF                                                                                           |
| Printing speed         | 4Pass 6m/h, 6Pass 4m/h                                                                                       |
| Printing material      | Pet Film                                                                                                     |
| Working Environment    | 15-30°C                                                                                                      |
| Inks Type              | Textile Pigment ink                                                                                          |
| Voltage/Power          | 220V/110V                                                                                                    |
| Transmission Interface | Gigabit Network Port Transmission                                                                            |
| Ink supply system      | 1.5L Ink Bottle with Alarm Function+Secondary Continuous Ink Supply System+White Ink Agitate and Circulation |
| Document format        | PDF, JPEG, TIFF                                                                                              |

| Powder Shaker Machine     |                                                                          |
|---------------------------|--------------------------------------------------------------------------|
| Retract Medium Width      | 0-330mm                                                                  |
| Applicable Media          | Nylon, Chemical Fiber, Cotton, Leather, Swimwear, Wetsuit, PVC, EVA, etc |
| Powder Control            | Dusting Speed, Shaking speed, Curing Temperature                         |
| Heating & Drying Function | Multi-stage Heating system, Drying, Cold air fan function                |
| Rewind Function           | Automatic induction Winding                                              |
| Package Size              | 750*580*720mm 46kg 1010*620*630mm 73kg                                   |

#### 细节展示/MACHINE DETAILS



High Quality Power supply



Automatic Ink Absorption station



LCD Microcomputer Digital Temperature Controller



Emergency push button device



Running-in wheel



The paper feeding system

#### 产品特点/MACHINE FEATURES

1. Epson Print Heads Optional--XP600.
2. White ink stirring and circulation, no sedimentation, ensure smooth printing
3. Easy to operate, printing, powder shaking and drying, All in one
4. Adopting automatic induction winding function, saving time, effort, and labor

Email: postmaster@jiameiwanqin.com Phone: 0086-18631122850



## 24" / 60cm DTF printer with power shaker

www.jiameiscreen.com



DTF Pigment Ink



### 技术参数/TECHNICAL SPECIFICATION

| 60CM DTF Printer         |                                                   |
|--------------------------|---------------------------------------------------|
| Print Head               | Epson i3200/4720/XP600                            |
| Number of Print Head     | 2                                                 |
| Maximum Printing Width   | 620mm                                             |
| RIP Software             | Maintop 6.1 / Photo print                         |
| Motherboard              | Hoson / Senyang                                   |
| Language                 | Chinese / English                                 |
| Print Speed              | 4Pass:12m²/h,6Pass:8m²/h,8Pass:6m²/h              |
| Print Accuracy           | 360°2400dpi,360°3600dpi,720°2400dpi               |
| Environmental conditions | temperature 20-28C,Relative Humidity:65%-75%      |
| Ink Type & Configuration | Textile Pigment Ink C/M/Y/K/Lc/Lm/W               |
| Heating Method           | Pre-heater,Printing bed heater,Rear heater 30-65C |
| Working Power Supply     | 220v/110v,50HZ/60HZ                               |
| Printer Powder           | Printer:350w                                      |

| Powder Shaker Machine     |                                                                   |
|---------------------------|-------------------------------------------------------------------|
| Retract Medium Width      | 0-600mm                                                           |
| Applicable Media          | Nylon,Chemical Fiber,Cotton,Leather,Swimwear,Wetsuit,PVC,EVA,etc. |
| Powder Control            | Dusting Speed,Shaking speed,Curing Temperature                    |
| Heating & Drying Function | Multi-stage Heating system,Drying,Cold air fan function           |
| Rewind Function           | Automatic Induction Winding                                       |
| Package Size              | 167*76*68cm 150KG    139*96*125cm 130KG                           |

### 细节展示/MACHINE DETAILS



High capacity ink supply system



Elevation Capping Station



Suction Platform



Japan THK Linear Guide Rail



Temperature Control Panel



Automatic induction winding

### 产品特点/MACHINE FEATURES

- 1.Epson Print Heads Optional---XP600/4720/13200
- 2.White ink stirring and circulation, no sedimentation, ensure smooth printing
- 3.Easy to operate, printing, powder shaking and drying, All in one
- 4.Adopting automatic induction winding function, saving time, effort, and labor

Address:Nanbaizhuang Village,Shenze County,Shijiazhuang City,Hebei province, China



河北深泽嘉美网印器材有限公司  
HEBEI SHENZE JIAMEI SCREEN PRINTING EQUIPMENT CO.,LTD.

## A2 /43cm DTF printer with power shaker



DTF Pigment Ink



### 技术参数/TECHNICAL SPECIFICATION

| 60CM DTF Printer         |                                                                                     |
|--------------------------|-------------------------------------------------------------------------------------|
| Print Head               | Epson i3200/4720/XP600                                                              |
| Number of Print Head     | 2                                                                                   |
| Maximum Printing Width   | 430mm                                                                               |
| RIP Software             | Maintop 6.1 / Photo print                                                           |
| Motherboard              | Hoson / Senyang                                                                     |
| Language                 | Chinese / English                                                                   |
| Print Speed              | I3200: 4Pass: 12m²/h,6Pass:8m²/h,8Pass:6m²/h<br>XP600: 6Pass:4.5m²/h,8Pass: 3.5m²/h |
| Print Accuracy           | 360°2400dpi,360°3600dpi,720°2400dpi                                                 |
| Environmental conditions | Temperature 20-28C,Relative Humidity:65%-75%                                        |
| Ink Type & Configuration | Textile Pigment Ink C/M/Y/K/Lc/Lm/W                                                 |
| Heating Method           | Pre-heater,Printing bed heater,Rear heater 30-65C                                   |
| Working Power Supply     | 220v/110v,50HZ/60HZ                                                                 |
| Printer Powder           | Printer:350w                                                                        |

| Powder Shaker Machine     |                                                                   |
|---------------------------|-------------------------------------------------------------------|
| Retract Medium Width      | 0-450mm                                                           |
| Applicable Media          | Nylon,Chemical Fiber,Cotton,Leather,Swimwear,Wetsuit,PVC,EVA,etc. |
| Powder Control            | Dusting Speed,Shaking speed,Curing Temperature                    |
| Heating & Drying Function | Multi-stage Heating system,Drying,Cold air fan function           |
| Rewind Function           | Automatic Induction Winding                                       |
| Package Size              | 109*65*63cm 70kg    88*74*81cm58kg                                |

### 细节展示/MACHINE DETAILS



High capacity ink supply system



Elevation Capping Station



Suction Platform



Japan THK Linear Guide Rail



White ink stirring and circulation buttonAutomatic induction winding



### 产品特点/MACHINE FEATURES

- 1.Epson Print Heads Optional---XP600/4720/13200
- 2.White ink stirring and circulation,no sedimentation, ensure smooth printing
- 3.Easy to operate, printing, powder shaking and drying, All in one
- 4.Adopting automatic induction winding function, saving time, effort, and labor

Email: postmaster@jiameiwangyin.com Phone: 0086-18631122850



A3 / 33cm DTF printer with power shaker

www.jiameiscreen.com



DTF Pigment Ink  
C M Y K W Lc Lm

技术参数/TECHNICAL SPECIFICATION


| A3 DTF Printer           |                                                                                      |
|--------------------------|--------------------------------------------------------------------------------------|
| Print Head               | Epson i3200/4720/xp600                                                               |
| Number of Print Head     | 2                                                                                    |
| Maximum Printing Width   | 330mm                                                                                |
| RIP Software             | Maintop 6.1/Photo print                                                              |
| Motherboard              | Hoson / Senyang                                                                      |
| Language                 | Chinese / English                                                                    |
| Print Speed              | 13200: 4Pass: 10m²/h,6Pass:6m²/h,8Pass:4m²/h<br>XP600: 6Pass: 4.5m²/h,8Pass: 3.5m²/h |
| Print Accuracy           | 360°2400dpi,360°3600dpi,720°2400dpi                                                  |
| Environmental conditions | Temperature20-28°C.Relative Humidity:65%-75%                                         |
| Ink Type & Configuration | Textile Pigment Ink C/M/Y/K/Lc/Lm/W                                                  |
| Heating Method           | Pre-heater, Printing bed heater,Rear heater 30-65℃                                   |
| Working Power Supply     | 2220v/110v,50HZ/60HZ                                                                 |
| Printer Powder           | Printer:350w                                                                         |

| Powder Shaker Machine     |                                                                   |
|---------------------------|-------------------------------------------------------------------|
| Retract Medium Width      | 0-330mm                                                           |
| Applicable Media          | Nylon,Chemical Fiber,Cotton,Leather,Swimwear,Wetsuit,PVC,EVA,etc. |
| Powder Control            | Dusting Speed, Shaking speed,Curing Temperature                   |
| Heating & Drying Function | Multi-stage Heating system, Drying, Cold air fan function         |
| Rewind Function           | Automatic Induction Winding                                       |
| Package Size              | 98°63°64 65KG 80°60°73 45KG                                       |

细节展示/MACHINE DETAILS



High capacity ink supply system

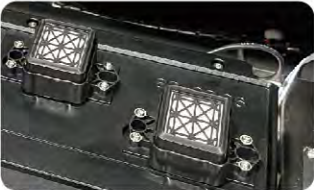

Elevation Capping Station



Suction Platform



Japan THK Linear Guide Rail



White ink stirring and circulation buttonAutomatic induction winding


产品特点/MACHINE FEATURES

- 1.Epson Print Heads Optional--XP600/4720/13200
- 2.White ink stirring and circulation, no sedimentation, ensure smooth printing
- 3.Easy to operate, printing,powder shaking and drying, All in one
- 4.Adopting automatic induction winding function, saving time, effort, and labor



河北深泽嘉美网印器材有限公司  
HEBEI SHENZE JIAMEI SCREEN PRINTING EQUIPMENT CO.,LTD.

A3 / 30cm UV DTF printer with dual or three print heads

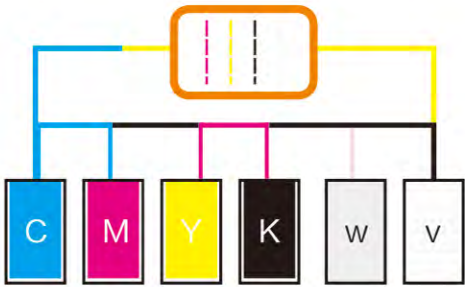

5/7 colore free conversion

技术参数/TECHNICAL SPECIFICATION

| A3 UVDTF Printer         |                                         |
|--------------------------|-----------------------------------------|
| Print Head               | Espon XP600                             |
| Printing width           | 300mm                                   |
| Number of Print Head     | 2/3 pcs                                 |
| Printing speed           | 6Pass:4m²/h,8Pass: 2.1m²/h,12Pass:1m²/h |
| Printing Materials       | AB film                                 |
| Print Accuracy           | 360°2400dpi,360°3600dpi,720°2400dpi     |
| Ink Type & Configuration | Textile Pigment Ink C/MY/K/+W+V         |
| RIP Software             | Maintop 6.1/photoprint/RIIN             |
| Motherboard              | Hoson                                   |
| Printer size             | 96°68°100cm                             |
| Weight                   | 140kg                                   |
| Language                 | Chinese / English                       |

| Operating Environment    |                                                  |
|--------------------------|--------------------------------------------------|
| Working power supply     | 220V/110V,50/60HZ                                |
| Power                    | Printer:350w<br>Powder dryer:400w                |
| Environmental conditions | Temperature 20-28°C.relative humidity:65%-75%    |
| Heating Method           | Pre-heater,printing bed heater,rear heater30-65℃ |

细节展示/MACHINE DETAILS



Control Panel



300mm Wide Print Media



with 2/3 print heads



Intelligent ink detection system



Unbiased winding



roll to roll take up system


产品特点/MACHINE FEATURES

- 1.Only 1 machine, saving space
- 2.Fast printing speed, improve efficiency
- 3.Use UV ink to print and dry with UV light
- 4.High-precision printing, printing patterns with higher resolution
- 5.Toning through color software to obtain rich colors and achieve higher quality



## A1/60cm UV DTF printer with three print heads

www.jiameiscreen.com

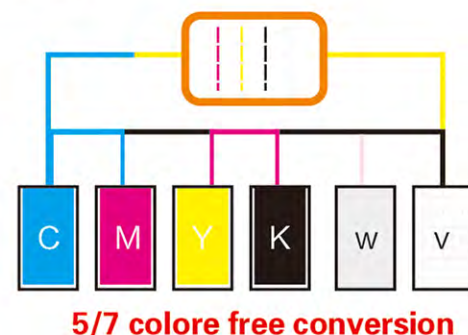


### 技术参数/TECHNICAL SPECIFICATION

| A3 UV DTF Printer        |                                                                                      |
|--------------------------|--------------------------------------------------------------------------------------|
| Print Head               | Espon XP600                                                                          |
| Printing width           | 600mm                                                                                |
| Number of Print Head     | 3 pcs                                                                                |
| Printing speed           | 6Pass:4.5m <sup>2</sup> /h, 8Pass: 3.1m <sup>2</sup> /h, 12Pass:1.8m <sup>2</sup> /h |
| Printing Materials       | AB film                                                                              |
| Print Accuracy           | 360*2400dpi, 360*3600dpi, 720*2400dpi                                                |
| Ink Type & Configuration | Textile Pigment Ink C/M/Y/K+W+V                                                      |
| RIP Software             | Maintop 6.1/photoprint/RIIN                                                          |
| Motherboard              | Hoson                                                                                |
| Printer size             | 138*86*100cm                                                                         |
| Weight                   | 168kg                                                                                |
| Language                 | Chinese / English                                                                    |

| Operating Environment    |                                                      |
|--------------------------|------------------------------------------------------|
| Working power supply     | 220V/110V, 50/60HZ                                   |
| Power                    | Printer: 350w                                        |
|                          | Powder dryer: 400w                                   |
| Environmental conditions | temperature 20-28°C, relative humidity: 65%-75%      |
| Heating Method           | Pre-heater, printing bed heater, rear heater 30-65°C |

### 细节展示/MACHINE DETAILS

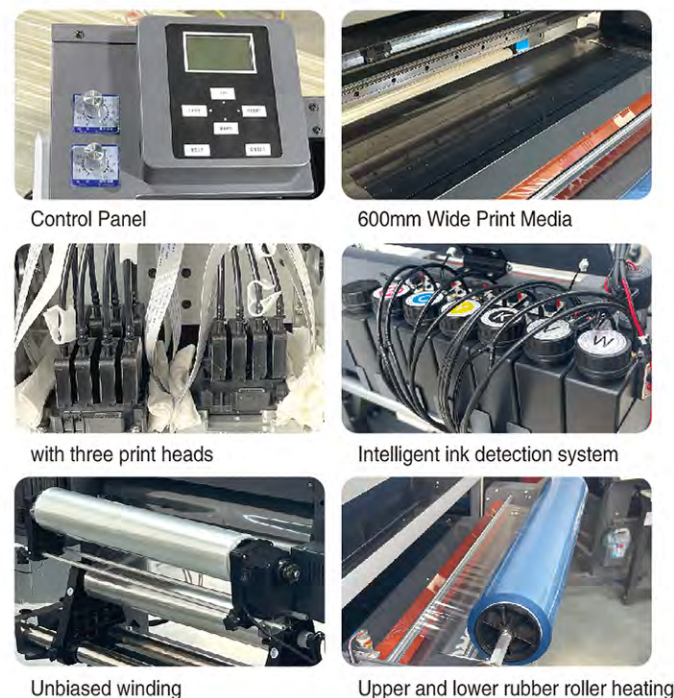

### 产品特点/MACHINE FEATURES

1. Only 1 machine, saving space
2. Fast printing speed, improve efficiency
3. Use UV ink to print and dry with UV light
4. High-precision printing, printing patterns with higher resolution
5. Toning through color software to obtain rich colors and achieve higher quality



河北深泽嘉美网印器材有限公司  
HEBEI SHENZE JIAMEI SCREEN PRINTING EQUIPMENT CO., LTD.

## DTF ink



Color: CMYKLcLm W

Volume: 1000ml per bottle

Features:

- ◆ Vivid ink colors
- ◆ High color density
- ◆ Smooth ink flow
- ◆ Superb wash resistance
- ◆ Excellent textile performance
- ◆ Long lasting and excellent wash astness

## TPU powder

Color: White

Particle size: 80-180um

Melting point: 115-120 degrees

Package: 1kg/bag, 5kg/bag, 20kg/bag

Features:

- ◆ Soft and excellent elasticity
- ◆ Good bond strength
- ◆ Excellent in resistance to washing and dry cleaning no leaking
- ◆ Environmental friendly



## DTF Film



Material: PET

Thickness: 75um, 100um

Roll width: 30cm/33cm/43cm/60cm

Roll length: 100m

Tear off method: cold peel / hot peel

Features:


- ◆ 100% strong ink absorption and even layers
- ◆ No sticking powder
- ◆ Stable performance
- ◆ Easy to peel off





# A3 DTF PRINTER

Single Epson print head

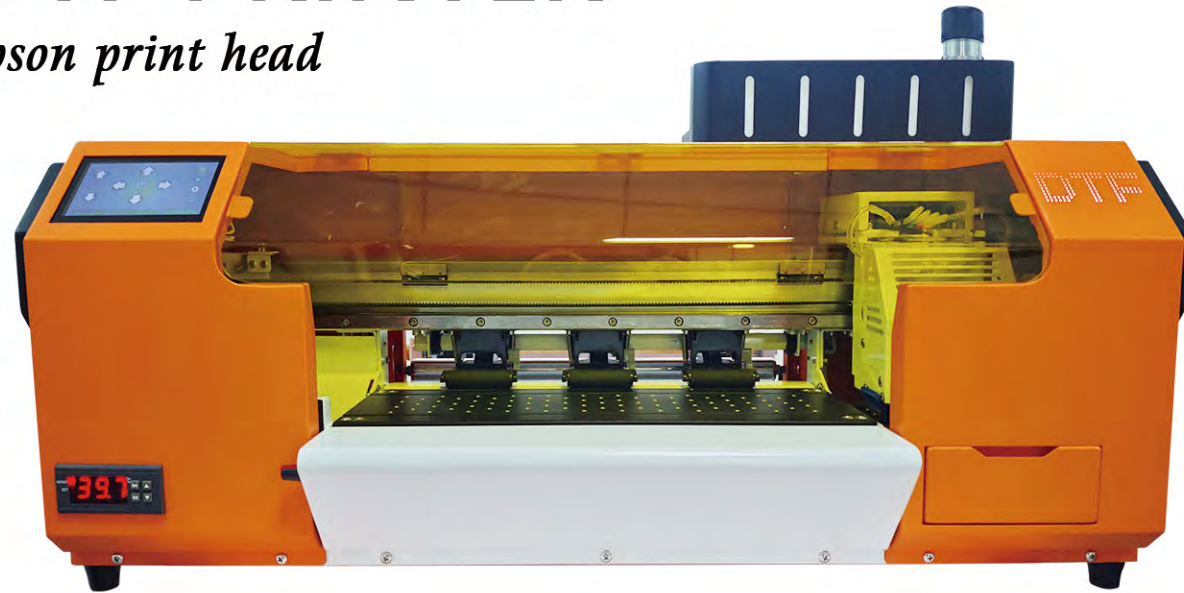

DTF INK



HOT MELT POWDER



DTF FILM

## 技术参数/Product Parameters

|                 |                                             |                     |                                                          |
|-----------------|---------------------------------------------|---------------------|----------------------------------------------------------|
| Print head      | XP600                                       | Work environment    | 25-28°C/50%25-28°C/50%<br>temperature/humidity/cleanroom |
| Head Qty        | 1                                           | Ink Capacity        | 300ML                                                    |
| Printing speed  | XP600-1H 6PASS 2㎡/h<br>XP600-1H 8PASS1.5㎡/h | Computer system     | Windows7/Windows10                                       |
| Ink type        | DTF ink                                     | RIP software        | MainTop/PP                                               |
| Print color     | CMYK-W                                      | File format         | TIFF                                                     |
| Connection mode | USB2.0/3.0                                  | G W/N W             | 38KG/51KG                                                |
| Print width     | 300mm                                       | Machine size(L*W*H) | 800X400X470MM                                            |
| Voltage/Power   | 110V/220V,50-60HZ/120W                      | Packing size(L*W*H) | 890X460X600MM                                            |

## 应用/Application range

(Applicable to any fabric, knitted, woven, non-woven, canvas, PU)



Umbrella



T-shirt & Shorts



Pillow



Canvas bag



Jeanswear



Coin bag


## 产品优势/Product Advantage



1. Touch screen control




2. Cartridge with control switch

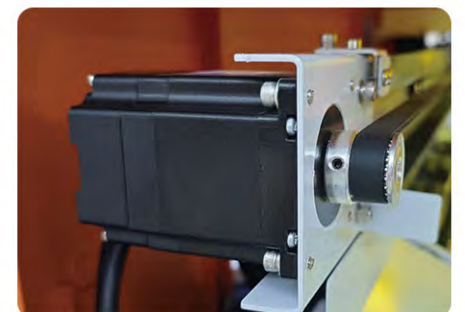


3. Motor: Lei Sai



4. Print platform guide rail

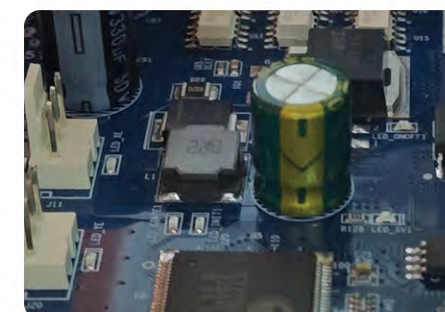

5. Main board

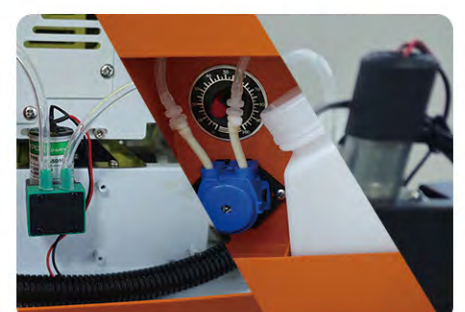

6. Ink pump/White ink circulation pump/White ink stirring



# A3 UV DTF PRINTER

Single Epson print head

UV AB film



UV dtf ink



▶ 技术参数/Product Parameters

|                        |                             |                       |                     |                                         |
|------------------------|-----------------------------|-----------------------|---------------------|-----------------------------------------|
| Print head             | DX7/XP600                   |                       | Laminating film     | Constant temperature heating(automatic) |
| Number of Print head   | 1 pcs                       |                       | Voltage             | 220V/110V,50/60HZ                       |
| Printing speed         | DX7-1H 8PASS 0.65㎡/h        | XP600-2H 6PASS 2㎡/h   | Machine power       | 800W                                    |
|                        | DX7-1H 12PASS 0.4㎡/h        | XP600-2H 8PASS 1.3㎡/h |                     |                                         |
| Ink type               | UV DTF special ink          |                       | RIP software        | MainTop/PP                              |
| Printing width         | 300mm                       |                       | Motherboard         | Hoson                                   |
| Printing material      | AB film                     |                       | G W/N W             | 38KG/70KG                               |
| Media width            | 30MM                        |                       | Machine size(L*W*H) | 820X520X720MM                           |
| Transmission Interface | 1000Mbps Ethernet interface |                       | Packing size(L*W*H) | 890X700X630MM                           |

▶ 应用/Application range

(Applicable to hard products such as glass, ceramics, wood, plastic, etc)



Suitcase



Stainless steel water cup



Lotion Bottle/Glass bottle



Wooden Crafts

▶ 产品优势/Product Advantage



1. 2 types of printheads /2 types of printing schemes  
XP600: Color + White + Varnish  
DX7: Color + White + Color + Varnish



3. Suction platform :  
protecting the print head from scratches by foreign  
objects and extending its service life.



2. Rubber Rollers:  
Electric lifting, uniform pressure, high  
temperature resistance



4. Precipitation prevention: Circulation/agitation  
pumps; Dual alarms: Ink level+ waste ink





# 6090

## UV FLATBED PRINTER

Printing height 0-14cm



### 技术参数/Product Parameters

|                 |                                                    |                           |                           |                        |                                       |
|-----------------|----------------------------------------------------|---------------------------|---------------------------|------------------------|---------------------------------------|
| Nozzle Model    | EPSON xp600                                        | EPSON i3200U1             | EPSON i1600U1             | Power Supply Voltage   | 220V/110V 50/60HZ                     |
| Nozzle Quantity | 3                                                  |                           |                           | Printing Accuracy      | 720X1440 DPI                          |
| Printing Speed  | 6PASS 4m <sup>2</sup> /h                           | 6PASS 12m <sup>2</sup> /h | 6PASS 8m <sup>2</sup> /h  | Working Environment    | 15-30°C, Temperature 20-30%           |
|                 | 8PASS 3m <sup>2</sup> /h                           | 8PASS 10m <sup>2</sup> /h | 8PASS 6m <sup>2</sup> /h  | Rip Software           | Maintop6.1/Photoprint                 |
|                 | 12PASS 2m <sup>2</sup> /h                          | 12PASS 7m <sup>2</sup> /h | 12PASS 4m <sup>2</sup> /h |                        |                                       |
| Printing Medium | Acrylic/Metal/Various Signs/Glass/Plastic/Stone... |                           |                           | Document Format        | Jpg/Tiff/Pdf                          |
| Power           | 550W                                               |                           |                           | Transmission Interface | Gigabit Network Interface             |
| Ink Type        | UV INK                                             |                           |                           | Machine Size           | 1760mm*1550mm*620mm                   |
| Ink Color       | CMYKMLC + W V / CMYK + W V                         |                           |                           | Wodden Box Size        | 1830mm*1680mm*850mm                   |
| Print Size      | 600mm*900mm                                        |                           |                           | Packaging Weight       | 250kg(Excluding Tripod) Tripod 28.3kg |

### 应用/Application range



Suitcase



Stainless steel water cup



KT board



Lotion Bottle/Glass bottle




Wooden Crafts



Phone case

### 产品优势/Product Advantage

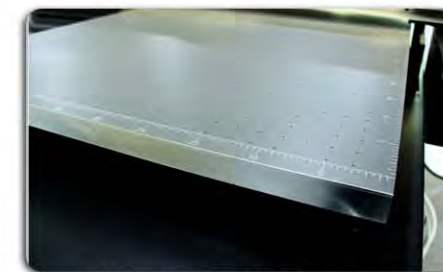

Stable suction platform for secure printing.



High-capacity 6-color ink system with low-ink alert and white ink agitation functions.



Infrared height detection to prevent printhead contact (14cm lift).



Durable and damage-resistant construction.



High-power water-cooled UV lamp for long service life.



Corrosion-resistant titanium ink station for effective cleaning.





# HTA3 UV FLATBED PRINTER

Printing height 0-10cm



▶ 技术参数/Product Parameters

|                         |                                                                              |                     |                                                         |
|-------------------------|------------------------------------------------------------------------------|---------------------|---------------------------------------------------------|
| Print head              | XP600 / TX800 / DX7                                                          | Ink Type            | UV environmentally friendly ink                         |
| Head Qty                | 1                                                                            | Ink curing method   | UV lamp and fan                                         |
| Print resolution        | 720DPI (4pass) /1440DIP (8pass) /2880DPI (16pass)                            | Print media         | Metal plate, acrylic, suspended ceiling, leather, stone |
| Print speed             | 2-7 square meters/hour (depending on the printing resolution and print head) | Connection method   | USB3.0                                                  |
| Print size              | 300*450mm                                                                    | Voltage/power       | 220V、50HZ、500W                                          |
| Print height            | 0-100mm                                                                      | Work environment    | Temperature 15-30°C, humidity 45%-65%                   |
| Printing platform       | Tempered glass platform/adsorption platform                                  | RIP software        | Riin, maintop, pp                                       |
| Lift                    | Print platform lifting                                                       | File format         | TIFF/JPEG/PDF, etc.                                     |
| Print height adjustment | Manual adjustment                                                            | G. N                | 50kg/67kg                                               |
| Color Scheme            | CMYK+W+V / CMYK+W / CMYKLcLm+w / CMYKLcLmLkLk                                | Machine size(L*W*H) | 710*730*540mm                                           |
|                         |                                                                              | Packing size(L*W*H) | 790*810*710MM                                           |

▶ 应用/Application range

(Applicable to hard products such as glass, ceramics, wood, plastic, etc)



Suitcase



Phone case



Packaging gift box



Logo labels



Acrylic poster



Glass bottles

▶ 产品优势/Product Advantage



1. The vacuum printing platform can be raised and lowered by 12cm, and a cylindrical fixture can be added



2. Ink shortage alarm indicator



## UV DTF ink

www.jiameiscreen.com



Color: CMYK+W+Varnish

Volume: 1000ml/Bottle

Features:

- ◆ Print smooth and fast curing
- ◆ Appear rich and colorful colors
- ◆ The printed pattern is not easy to deform
- ◆ Good adhesion and more vivid pattern

## UV DTF film


Type: pet film A film+B film

Roll width: 30cm/60cm

Roll length: 100m

Features:


- ◆ Easy to tear and cut
- ◆ Use pet film A and B together, without powder shaking
- ◆ Strong durability, the pattern is clearly presented on the surface
- ◆ Widely used in various object materials: flat, wood, ceramic, glass, metal etc

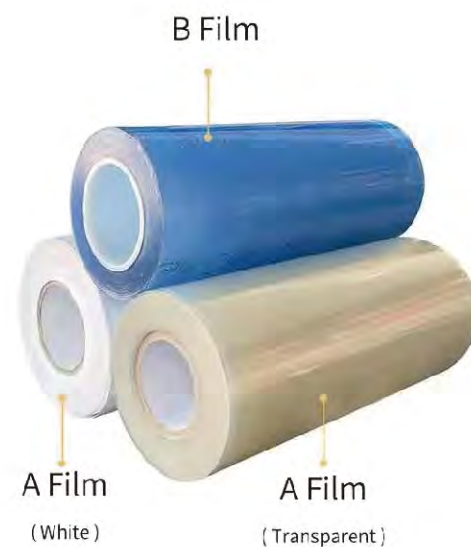


## DTF Printing Process



河北深泽嘉美网印器材有限公司  
HEBEI SHENZE JIAMEI SCREEN PRINTING EQUIPMENT CO., LTD.

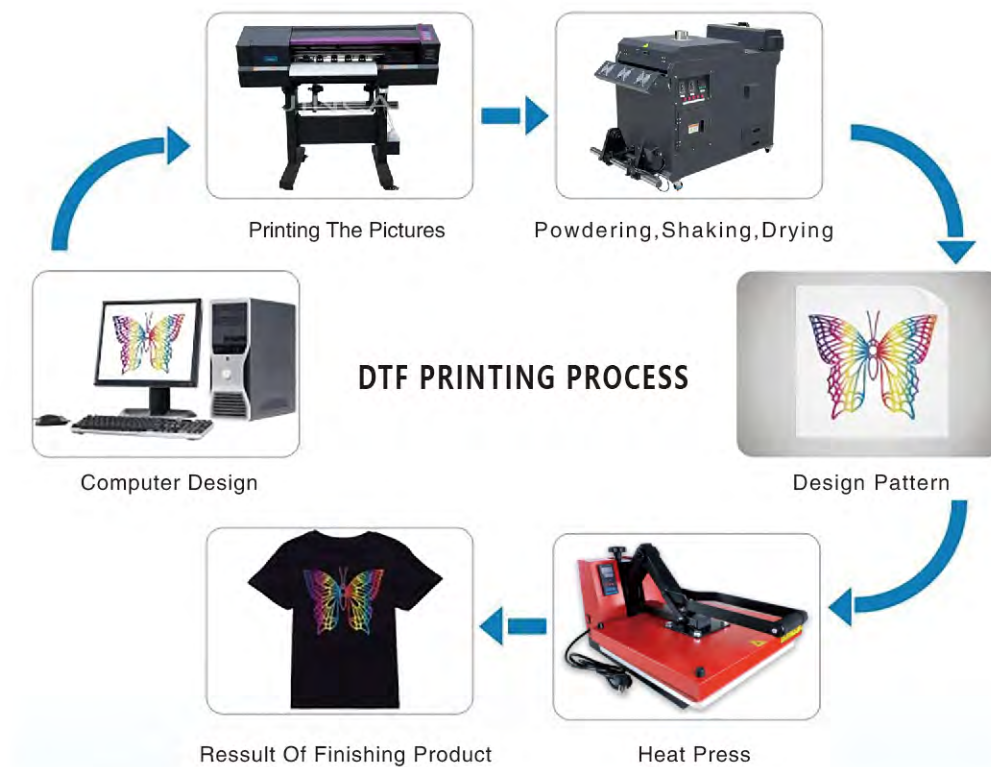

What can this machine do ?



Can transfer patterns to a variety of different materials