




WIRE TEC



Your wire expert

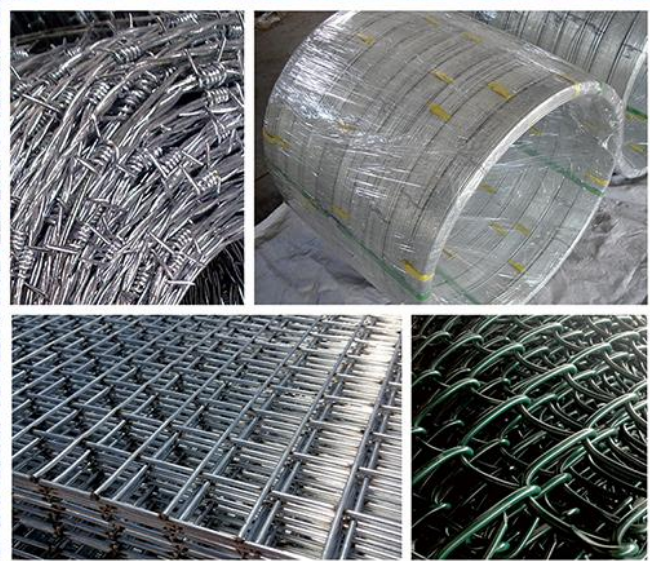

LANOVA TRADE (HEBEI) CO.,LTD

Add: Room 919,Block 2,Wanda Plaza,No.136,Jianhua south street
Shijiazhuang,Hebei,China

Tel: 0086-311-69025506

Fax: 0086-311-83078840

Email: info@lanovatech.com , lanova@foxmail.com

Web: www.lanovatech.com

LANOVA TRADE (HEBEI) CO.,LTD



ABOUT US

LANOVA TRADE (HEBEI)CO.,LTD HAS BEEN A PROFESSIONAL SUPPLIER IN WIRE PRODUCTS MANY YEARS. GALVANIZED WIRE, PVC COATED WIRE,BLACK WIRE AND KINDS OF MESHES ARE MAIN PRODUCTS. WE HAVE A LARGE-SCALE MODERNIZED FACTORY,PROFESSIONAL TEAM,SCIENTIFIC MANAGEMENT SYSTEM,ALL OF WHICH HAVE GUARANTEED US THE LEADING POSITION IN WIRE BUSINESS FIELD, AND OUR PRODUCTS ARE SOLD WELL IN AMERICA,EUROPE AND AUSTRALIA.

LANOVA RELIES ON ENTERPRISE SPIRIT THAT"FOCUS, PROFESSIONAL, INNOVATION, CUSTOMER FIRST, SUSTAINABLE DEVELOPMENT." WE INSIST THAT "HIGH QUALITY IS COMPANY'S GREATEST REPAYMENT;SATISFACTION OF CUSTOMER IS ULTIMATE AIM OF COMPANY". WE DEVOTE TO HELP OUR CUSTOMERS TO BE THE BEST IN THEIR OWN MARKET WITH OUR MOST COMPETITIVE PRODUCTS AND BEST SERVICE.

LANOVA IS PROUD OF ITS YOUNG WELL TRAINED TEAM, THAT IS FULL OF AMBITION, AND CREATIVITY, AND WE CORDIALLY WELCOME IN AND ABROAD CUSTOMERS TO CONSULT BUSINESS WITH US FOR JOINT DEVELOPMENT.

CONTENTS

- 01. MESH & NETTING.....01-12
- 02. GABIONS AND MATTRESS.....13-16
- 03. WIRE.....17-25
- 04. NAILS.....26-30
- 05. CONSTRUCTION PRODUCTS.....31-36



MESH & NETTING

HEXAGONAL WIRE MESH

HEXAGONAL WIRE NETTINGS PRODUCED WITH SUPERIOR QUALITY LOW-CARBON IRON WIRE,NORMALLY GALVANIZED PLASTIC COATED FOR LONG LIFE,THE MESH IS FIRM IN STRUCTURE AND HAS FLAT SURFACE.HEXAGONAL WIRE NETTING IS EXTENSIVELY USED IN INDUSTRIAL AND AGRICULTURAL CONSTRUCTIONS.ALSO IT CAN BE USED AS FENCE FOR POULTRY CAGE. FISHING,GARDEN,CHILDREN PLAYGROUND AND CHRISTMAS DECORATIONS.


HEX.WIRE NETTING IN NORMAL TWIST (IN 5M,10M,25M,30M,100M,TO 3000M ROLL,WIDTH OF 0.5M-2.0M)		
INCH	MESH	WIRE GAUGE (BWG)
3/8"	10MM	27, 26, 25, 24, 23, 22, 21
1/2"	13MM	27, 26, 25, 24, 23, 22, 21, 20
5/8"	16MM	27, 26, 25, 24, 23, 22
3/4"	20MM	25, 24, 23, 22, 21, 20, 19
1"	25MM	25, 24, 23, 22, 21, 20, 19, 18
1-1/4"	30MM	22, 21, 20, 19, 18
1-1/2"	40MM	22, 21, 20, 19, 18, 17
2"	50MM	22, 21, 20, 19, 18, 17, 16, 15, 14
3"	75MM	21, 20, 19, 18, 17, 16, 15, 14
4"	100MM	17, 16, 15, 14

HEX.WIRE NETTING IN REVERSE TWIST (IN 5M,10M,25M,30M,100M,TO 3000M ROLL,WIDTH OF 0.5M-2.0M)		
INCH	MESH	WIRE GAUGE (BWG)
1"	25MM	22, 21, 20, 19, 18
1-1/4"	30MM	22, 21, 20, 19, 18
1-1/2"	40MM	20, 19, 18, 17
2"	50MM	20, 19, 18, 17, 16
3"	75MM	20, 19, 18, 17, 16

HEX.WIRE NETTING IN PVC-COATED (IN LENGTH OF 5M,10M,25M,30M,WIDTH OF 0.5M,1.0M,1.2M,1.5M)		
MESH	WIRE GAUGE	
1/2"	13MM	0.9MM,1.0MM
5/8"	16MM	0.9MM,1.0MM
3/4"	19MM	0.9MM,1.0MM
1"	25MM	1.0MM,1.2MM,1.4MM
1-1/2"	40MM	1.0MM,1.2MM,1.4MM,1.6MM
2"	50MM	1.0MM,1.2MM,1.4MM,1.6MM,2.0MM

- PACKING:
IN ROLL WRAPPED BY WATER-PROOF ,OR SHRINK WRAPPED.

- REMARK:
SIZES OTHER THAN THOSE ABOVE-MENTIONED MAY BE MADE TO ORDER AFTER CONSIDERATION.
COMMON CARTON:IT CAN PROTECT THE INNER GOODS AND EASY TO HANDLE, TRANSPORT AND STOCK.



- AVAILABLE
- GALVANIZED BEFORE WEAVING
 - GALVANIZED AFTER WEAVING
 - PVC-COATED
 - STAINLESS STEEL


WELDED WIRE MESH

WELDED WIRE MESH IS MADE OF HIGH QUALITY IRON WIRE THROUGH AUTOMATIC PROCESS AND SOPHISTICATED WELDING TECHNIQUE, LAID HORIZONTALLY AND VERTICALLY, INDIVIDUALLY WELDED AT EVERY INTERSECTION. THE END PRODUCTS IS LEVEL AND FLAT WITH STURDY STRUCTURE.

WELDED WIRE MESH IS EXTENSIVELY USED IN INDUSTRY AND AGRICULTURE, BUILDING, TRANSPORTATION AND MINING FOR ALL SUCH PURPOSES AS POULTRY HOUSES, EGG BASKETS, RUNWAY ENCLOSURES, DRAINING RACK, FRUIT DRYING SCREEN, FENCE.

FOR FINISH, WE CAN SUPPLY THE FOLLOWING KINDS:

- HOT-DIPPED GALVANISED AFTER WELDING
- HOT-DIPPED GALVANISED BEFORE WELDING
- ELECTRIC-GALVANISED AFTER WELDING
- ELECTRIC-GALVANISED BEFORE WELDING
- PVC-COATED
- IN STAINLESS STEEL



STANDARD MESH IN ROLL OF 5M-45M LONG AND 0.5M-1.8M WIDE		
MESH	WIRE GAUGE	
INCH	MM	(BWG)
1/4"x1/4"	6.4MMX6.4MM	22, 23, 24, 25
3/8"x3/8"	10.6MMX10.6MM	19, 20, 21, 22
1/2"x1/2"	12.7MMX12.7MM	16, 17, 18, 19, 20, 21, 22, 23, 24
5/8"x5/8"	16MMX16MM	18, 19, 20, 21
3/4"x3/4"	19.1MMX19.1MM	16, 17, 18, 19, 20, 21
1"x1"	25.4MMX25.4MM	14, 15, 16, 17, 18, 19, 20
1-1/2"x1-1/2"	38MMX38MM	14, 15, 16, 17, 18, 19
1"x1/2"	25.4MMX12.7MM	16, 17, 18, 19, 20, 21
1"x2"	25.4MMX50.8MM	14, 15, 16, 17, 18, 19
2"x2"	50.8MMX50.8MM	12, 14, 15, 16, 17, 18
3"x2"	75MMX50MM	12, 14, 16
3"x3"	75MMX75MM	16, 17, 18
4"x2"	100MMX50MM	12, 14, 16
4"x3"	100MMX75MM	12, 14, 16
4"x4"	100MMX100MM	12, 14, 16
6"x6"	150MMX150MM	12, 14, 16

PACKING:

- EACH ROLL PACKED BY WATER PROOF PAPER
- EACH ROLL SHRINK WRAPPED

OTHER PACKING METHOD MAY BE ACCEPTED AFTER CONFIRMATION
OTHER SIZES BE PRODUCED AFTER CONFIRMATION

CHAIN LINK FENCE

- CHAIN LINK FENCE IS PRODUCED WITH QUALITY GALVANIZED WIRE OR PLASTIC COATED WIRE AND NORMALLY USED FOR PROTECTION, SECURITY AND LASTING FENCING.



GALVANIZED CHAIN LINK FENCE

MESH	WIDTH	WIRE GAUGE	WIDTH	LENGTH
3/4"	20MM	BWG15, 16	0.5-3M	5M-25M
1"	25MM	BWG14, 15, 16	0.5-3M	5M-25M
1-1/2"	40MM	BWG9, 10, 11, 12, 14	0.5-3M	5M-25M
2"	50MM	BWG8, 9, 10, 11, 12, 13, 14	0.5-3M	5M-25M
2-1/2"	60MM	BWG8, 9, 10, 11, 12, 13, 14	0.5-3M	5M-25M
3"	75MM	BWG8, 9, 10, 11, 12, 13, 14	0.5-3M	5M-25M

- PACKING: IN ROLLS, SPECIAL PACKING MAY BE ARRANGED UPON REQUEST

- REMARK: SIZES OTHER THAN THOSE ABOVE MENTIONED MAY BE MADE TO ORDER AFTER CONSIDERATION




PLASTIC COATED CHAIN LINK FENCE

MESH	WIRE GAUGE	WIDTH	LENGTH
50X50MM	1.8/2.8MM, 2.0/3.0MM, 2.5/3.5MM	0.5-3M	10-25M
60X60MM	1.8/2.8MM, 2.0/3.0MM, 2.5/3.5MM	0.5-3M	10-25M
75X75MM	1.8/2.8MM, 2.0/3.0MM, 2.5/3.5MM	0.5-3M	10-25M

- PACKING: IN ROLLS, SPECIAL PACKING MAY BE ARRANGED UPON REQUEST
- REMARK: SIZES OTHER THAN THOSE ABOVE MENTIONED MAY BE MADE TO ORDER AFTER CONSIDERATION

CATTLE FENCE

- CATTLE FENCE IS SUITABLE FOR BORDERS IN FIELDS AND GRASSLAND FOR BREEDING OF DEER, CATTLE AND OTHER ANIMALS.
- EDGE WIRE 2.4MM, INSIDE WIRE 1.90MM
- HORIZONTAL WIRE 700-800MPA
- VERTICAL WIRE 400-500MPA
- TWO HORIZON WIRE DISTANCE 300MM IS ALSO AVAILABLE

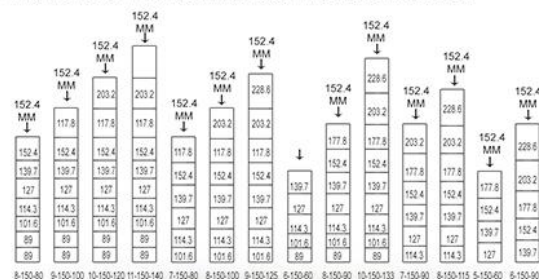

RABBIT FENCE

- SPECIALLY DESIGNED FOR PROTECTION FOR RABBIT, DOG AND OTHER SMALL ANIMALS.
- HORIZONTAL WIRE SPACINGS GET SMALLER TOWARDS THE GROUND.
- GALVANIZED FOR DURABILITY OR POLY-COATING OVER GALVANIZED WIRE FOR SUPERIOR DURABILITY.
- SHRINK WRAPPED FOR PROTECTION.

DESCRIPTION	PACKING
GALVANIZED RABBIT FENCE, 24"X50"	IN ROLL
GALVANIZED RABBIT FENCE, 28"X50"	IN ROLL
GALVANIZED RABBIT FENCE, 40"X50"	IN ROLL




DOG FENCE

DESCRIPTION	PACKING
GALVANIZED DOG FENCE, 1200MMX30M	IN ROLL
GALVANIZED DOG FENCE, 1200MMX10M	IN ROLL
GALVANIZED DOG FENCE, 1800MMX30M	IN ROLL

- REMARK: PVC-COATED ALSO AVAILABLE



WELDED FIELD FENCE

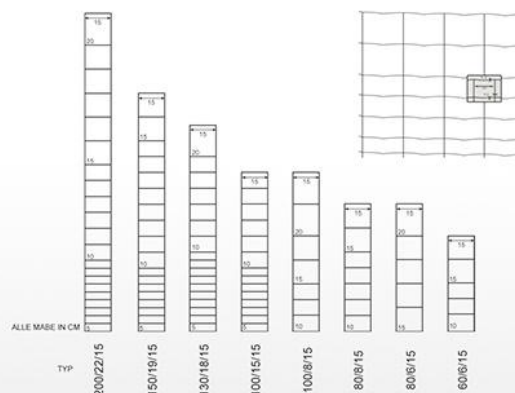

WELDED FENCE

- GALVANIZED WELDED FENCE
- IT IS MADE OF HOT DIP GALVANIZED WIRE, THE ZINC COATING CAN BE 60G/M² OR 240G/M²
- 25METERS ROLL,
- EACH ROLL PLASTIC SHRINK


MESH	DIAMETER
100X50	1.8MM
150X50	1.9MM
100X75	2.0MM
75X50	2.5MM



WELDED PANEL

- WELDED PANEL CAN BE MADE OF GALVANIZED WIRE OR BLACK WIRE



MESH	DIAMETER	DIMENSION
50X50MM	1.60mm-4.00mm	1000X2000MM
100X50MM	2.00mm-5.00mm	2500X2000MM
100X75MM	2.00mm-6.00mm	1600X2000MM



- ON PALLET PACKING

EXPANDED METAL MESH

DIMENSION OF STRANDS THICKNESS (MM)	SWM (MM)	LWM(MM)	DIMENSION OF STRANDS THICKNESS (MM)
0.5	2.5	4.5	0.5
0.5	10	25	0.5
0.6	10	25	1
0.8	10	25	1
1	10	25	1.1
1	15	40	1.5
1.2	10	25	1.1
1.2	15	40	1.5
1.5	15	40	1.5
1.5	23	60	2.6
2	18	50	2.1
2	22	60	2.6
3	40	80	3.8
4	50	100	4
4.5	50	100	5
5	50	100	5
6	50	100	6
8	50	100	8



EXPANDED METAL IS MADE OF STEEL OR SHEETS THAT ARE SIMULTANEOUSLY SLIT AND EXPANDED IN A COLD DRAWN OPERATION TO FORM DIAMOND SHAPED OPENINGS OF UNIFORM SIZE AND THICKNESS.



APPLICATION: REINFORCEMENT FOR LIGHT CONSTRUCTION MATERIALS AND CONCRETE POURING, RADIATOR GRILLS ON ALL TYPES OF VEHICLES AND AIR COMPRESSORS, SAFETY GUARDS FOR GEAR DRIVE EQUIPMENT ON VARIOUS KINDS OF MACHINES.

METALS AVAILABLE: MILD STEEL, GALVANIZED STEEL, STAINLESS STEEL, ALUMINIUM, TITANIUM, AND OTHER NON FERROUS METAL


PACKING: AVAILABLE IN SHEET OR ROLL FORM

STEEL GRATING

- STEEL GRATING IS RESISTANCE-WELDED FOR DURABILITY, STRENGTH AND SAFETY USING AN AUTOMATED ELECTRIC/HYDRAULIC WELDING PROCESS. HIGH TEMPERATURES, COMBINED WITH HIGH PRESSURE, FUSE THE BEARING BARS AND CROSS BARS TOGETHER TO FORM A PERMANENT JOINT.
- THE COMBINATION OF HEAVY-WEIGHT BEARING BARS AND TWISTED STEEL CROSS BARS PROVIDE EXCELLENT GRATING STABILITY AND LOADING CAPABILITIES. THE CROSS BARS ARE WELDED OR ELECTRO-FORGED TO THE RECTANGULAR SHAPED BEARING BARS BY A PROCESS THAT COMBINES INTENSE HYDRAULIC PRESSURE WITH A POWERFUL ELECTRIC CURRENT.
- THE MOST WIDELY USED GRATINGS, AVAILABLE FOR FLOORING, SIDEWALK, DRAINAGE PIT COVER, STAIR TREAD, ETC.

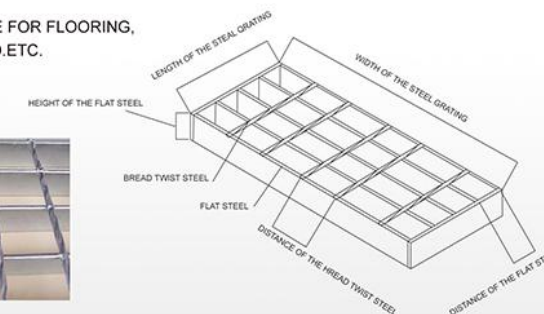


ANGLE BEAD

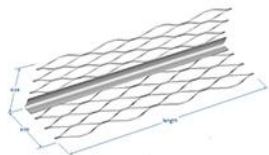

- ANGLE BEADS ARE DESIGNED FOR INTERNAL USE AND OUTER PLASTER USES, MANUFACTURED FROM QUALITY GALVANIZED STEEL SHEET, EXPANDED OR PERFORATED MESH. CAN BE REINFORCED WITH FLANGE WINGS OR STANDARD BEADS. MATERIALS CAN BE STAINLESS STEEL OR GALVANIZED STEEL.

- STRONG AND RESILIENT AND COST EFFECTIVE BEAD DESIGNED FOR TWO OR THREE COAT APPLICATIONS. IT GENERATES A TRUE, STRAIGHT CORNER WHICH PROVIDES STRENGTHENED PROTECTION FROM EVERYDAY KNOCKS.



FLANGE SIZE	THICKNESS	LENGTH
60MM	0.45MM	3M
60MM	0.45MM	3M
60MM	0.45MM	3M
30MM	0.45MM	3M

FLANGE SIZE	THICKNESS	LENGTH
45MM	0.45MM	3M



- AN EXPANDED FLANGE CORNER BEAD WITH EXTRA LONG EXPANDED FLANGE. IT HAS A STEEL RID RUNNING THE LENGTH OF THE BEAD PROVIDES NAIL HOLES AND EXTRA RIGIDITY.




FLANGE SIZE	THICKNESS	LENGTH
32MM	0.50MM	3M

- WE ARE ALSO ABLE TO PRODUCE OTHER SIZE ACCORDING TO CUSTOMERS' REQUEST.

TEMPLATE NETWORK

- IT HAS BEEN WIDELY APPLIED TO CONCRETE STRUCTURE OF PROJECTS. IT HAS BETTER STRESS STRENGTH AND FREE SHAPE, IT IS MOSTLY USED AS CONCRETE PERMANENT DISMANTLE FREE TEMPLATE FOR CIVIL ENGINEERING.

SIZE	THICKNESS	SPAN
450X2200MM	0.35MM	90MMX5
450X2200MM	0.45MM	90MMX5



SQUARE WIRE MESH




SQUARE IRON WIRE MESH IS MADE OF SELECTED LOW CARBON IRON WIRE WITH PRECISE CONSTRUCTION, UNIFORM MESH, FINE RUST RESISTANCE AND DURABLE SERVICE. IT IS EXTENSIVELY USED IN INDUSTRIES AND CONSTRUCTIONS TO SIEVE GRAIN POWDER, FILTER LIQUID AND GAS, FOR OTHER PURPOSES LIKE SAFETY GUARDS ON MACHINERY ENCLOSURES. BESIDES, IT WIDELY SUBSTITUTES FOR WOOD STRIPS IN MAKING WALL AND CELLING.

- PACKING: EACH ROLL WRAPPED WITH WATER PROOF PAPER, THEN COVERED WITH HESSIAN CLOTH.
- REMARK: SIZES OTHER THAN THOSE ABOVE MENTIONED CAN BE MADE TO ORDER AFTER CONSIDERATION.
- WIDTH CAN BE PRODUCED 0.5M-1.5M, LENGTH CAN BE PRODUCED 10M-30M

CRIMPED WIRE MESH

- CRIMPED WIRE MESH IS USUALLY MAINLY USED IN FOODSTUFF, MINE, CHEMICAL INDUSTRY, PHARMACY, METALLURGY, MACHINERY, PROTECTION, CONSTRUCTION, ARTS AND CRAFTS.
- MATERIAL AVAILABLE • CARBON IRON WIRE • GALVANIZED STEEL WIRE
- STAINLESS STEEL WIRE 301, 302, 304, 304L, 316, 316L, 321
- CRIMPED WIRE MESH IS WOVEN AFTER WIRE BEING CRIMPED
- SPECIFICATION REFERENCE LIST


CRIMPED WIRE MESH				
WIRE GAUGE (SWG)	WIRE DIAMETER (MM)	MESH	APERTURE (MM)	WEIGHT (KG)/M ²
6	4.8	1	20.6	11.5
8	4.05	2	9	16.5
10	3.2	2	10	10.5
12	2.6	3	5.9	10.5
14	2.0	3	6.5	6
16	1.6	4	5	5.5
17	1.4	5	5.1	5.0
18	1.2	5	4	3.6
19	1.0	6	3.2	3.0
21	0.8	7	2.8	2.3
22	0.7	8	2.5	2



NYLON WIRE NETTING

- VARIETY: NYLON SCREEN MESH, POLYAMIDE SCREEN MESH AND POLYESTER SCREEN MESH.
- MATERIAL: NYLON 1010, NYLON 66, POLYAMIDE AND POLYAMIDE FIBER.
- USE: SCREENING AND FILTERING OF PHARMACY, CHEMICAL INDUSTRY, DYE STUFF, FISHING AND FOODSTUFF.
- SIZE: 12MESH TO 100MESH.


MESH	WIDTH	LENGTH
14X14MESH	0.6-1.8M	15M,25M,30M,45M,50M
16X16MESH	0.6-1.8M	15M,25M,30M,45M,50M
16X18MESH	0.6-1.8M	15M,25M,30M,45M,50M
18X18MESH	0.6-1.8M	15M,25M,30M,45M,50M
20X20MESH	0.6-1.8M	15M,25M,30M,45M,50M
22X22MESH	0.6-1.8M	15M,25M,30M,45M,50M
25X25MESH	0.6-1.8M	15M,25M,30M,45M,50M
30X30MESH	0.6-1.8M	15M,25M,30M,45M,50M
40X40MESH	0.6-1.8M	15M,25M,30M,45M,50M
50X50MESH	0.6-1.8M	15M,25M,30M,45M,50M
60X60MESH	0.6-1.8M	15M,25M,30M,45M,50M
70X70MESH	0.6-1.8M	15M,25M,30M,45M,50M
80X80MESH	0.6-1.8M	15M,25M,30M,45M,50M
90X90MESH	0.6-1.8M	15M,25M,30M,45M,50M
100X100MESH	0.6-1.8M	15M,25M,30M,45M,50M



- PACKING: IN ROLLS, THEN PACKED IN CARTON, SPECIAL PACKING MAY BE ARRANGED UPON REQUEST
- REMARK: SIZES OTHER THAN THOSE ABOVE MENTIONED MAY BE MADE TO ORDER AFTER CONSIDERATION

KNITTED WIRE MESH

- KNITTED WIRE MESH IS A METAL, CERAMIC OR SYNTHETIC WIRE KNITTED INTO A MESH OF INTERLOCKING LOOPS. THIS MESH IS STRONG, FLEXIBLE, AND RESILIENT-GIVING KNITTED WIRE MESH UTILITY IN A NUMBER OF APPLICATIONS THAT OTHER MATERIALS ARE UNSUITED.
- AVAILABLE MATERIALS (OTHERS, PLEASE ASK)
 STAINLESS STEEL: GRADES AISI 302, 304, 316L
 OTHERS: ALUMINIUM, COPPER, AND BRASS, MILD STEEL, POLYPROPYLENE, ETC




STAINLESS STEEL WIRE MESH

- MATERIAL AVAILABLE: 302, 304, 316, 304L AND 316L.
- WEAVING AVAILABLE PLAIN WEAVE, TWILL WEAVE, DUTCH WEAVE. APPLICATION IN PROCESSING OF OILS, CHEMICALS, FOOD, PHARMACEUTICALS. ALSO SORTING AND SCREENING OF SOLID, LIQUID AND GAS IN MINE, METALLURGY, AIRSPACE, MACHINE MAKING, ETC.



BRASS WIRE MESH

- MATERIAL AVAILABLE: BRASS WIRE, PHOSPHOR BRONZE WIRE, OR COPPER WIRE
- APPLICATION: SEPARATION AND SIFTING KINDS PELLET, GRAIN, PORCELAIN EARTH AND GLASS, CHINAWARE PRINTING, FILTER LIQUID, ETC.
- WEAVING AVAILABLE: PLAIN WEAVE, TWILL WEAVE OR DUTCH WEAVE...

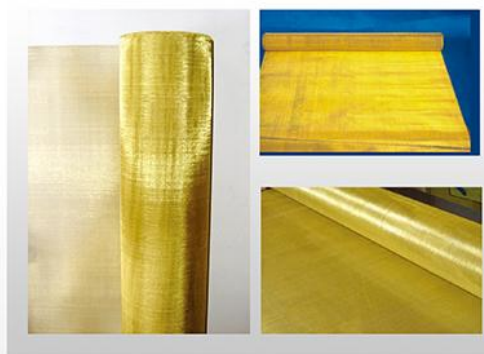

- AVAILABLE LENGTH: 30M 45M 50M
- WE ALSO CAN PROVIDE OTHER SPECIFICATIONS TO THE CLIENTS' REQUIREMENTS.

MESH	WIDTH
2X2MESH	0.6-1.8M
3X3MESH	0.6-1.8M
4X4MESH	0.6-1.8M
5X5MESH	0.6-1.8M
6X6MESH	0.6-1.8M
8X8MESH	0.6-1.8M
10X10MESH	0.6-1.8M
12X12MESH	0.6-1.8M
14X14MESH	0.6-1.8M
16X16MESH	0.6-1.8M
18X18MESH	0.6-1.8M
20X20MESH	0.6-1.8M
24X24MESH	0.6-1.8M
30X30MESH	0.6-1.8M
40X40MESH	0.6-1.8M
50X50MESH	0.6-1.8M
60X60MESH	0.6-1.8M
80X80MESH	0.6-1.8M
100X100MESH	0.6-1.8M
120X120MESH	0.6-1.8M
150X150MESH	0.6-1.8M
180X180MESH	0.6-1.8M
200X200MESH	0.6-1.8M
250X250MESH	0.6-1.8M
300X300MESH	0.6-1.8M
325X325MESH	0.6-1.8M
400X400MESH	0.6-1.8M
500X500MESH	0.6-1.8M

ALUMINUM WINDOW SCREEN



OVERLOCK EDGE

- ALUMINUM SCREEN IS LONG-LASTING, STREAK-FREE AND EASY TO MAINTAIN, MAKING IT AN IDEAL SCREENING SOLUTION FOR FREQUENT USE APPLICATIONS, INCLUDING WINDOWS, DOORS, PORCHES, GAZEBOS AND SCREEN ROOMS. STRONG AND DURABLE ALUMINUM SCREENING RESISTS RUST AND WILL NOT SAG AND A PROTECTIVE FINISH PREVENTS CORROSION AND STRENGTHENS THE WEAVE. ALUMINUM SCREEN PRODUCTS MATCH EXISTING SCREENING IN MOST OLDER HOMES.

STANDARD SIZE	WIRE DIA	STANDARD COLOR	STANDARD WIDTH	LENGTH	PACKING
18X16	0.011"	BRIGHT, CHARCOAL, BLACK	24",36",48",60",72"	100'	2 ROLLS/CARTON
					1 ROLL/CARTON
18X14	0.009"		0.6M,0.8M,1.0M, 1.2M,1.5M	30M	2 ROLLS/CARTON
					1 ROLL/CARTON



RETAIL PACKING



STANDARD SIZE	WIRE DIA	STANDARD COLOR	STANDARD WIDTH	LENGTH	PACKING
18X16	0.011"	BRIGHT, CHARCOAL, BLACK	24",36",48",60",72"	7'	15 ROLLS/CARTON
				25'	9 ROLLS/CARTON
18X14	0.009"		0.6M,0.8M,1.0M, 1.2M,1.5M	1.5M	24 ROLLS/CARTON
				3.0M	16 ROLLS/CARTON

- STRONGER CARDBOARD TUBE INSIDE, WITH COLOR LABEL AND PLASTIC BAG, THEN PUT INTO CARTON.



- OTHER SIZE AND COLOR MAYBE AVAILABLE BY CUSTOMER REQUEST.
- WE ALSO CAN SUPPLY OTHER DIFFERENT WIDTH AND LENGTH AS PER YOUR REQUIREMENTS!


FIBER GLASS WINDOW SCREEN



STANDARD SIZE	STANDARD COLOR	STANDARD WIDTH	LENGTH	PACKING
18X16	BLACK, GRAY, WHITE	24",36",48",60",72"	100'	2 ROLLS/CARTON
				1 ROLL/CARTON
18X14		0.6M,0.8M,1.0M, 1.2M,1.5M	30M	2 ROLLS/CARTON
				1 ROLL/CARTON



- FIBERGLASS PLAIN INSECT SCREEN: IT IS MADE OF GLASS FIBER BY THE MEANS OF FILAMENTSHIP PLASTIC COATING PROCESS, PLAIN WEAVING AND HIGH TEMPERATURE FIXING. THE PRODUCT HAS CHARACTERISTICS OF ADUMBRAL AND GOOD AERATION ERODING RESISTANT AND FIREPROOFING, EASY CLEANING AND FLEXIBLE, HIGH TENSILE STRENGTH, LONG SERVICE LIFE AND FEELS SOFT ETC.

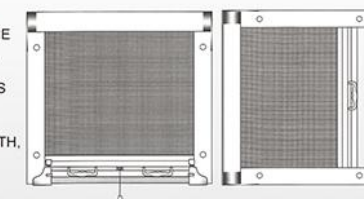



LANOVA TRADE (HEBEI) CO.,LTD
http://www.lanovatech.com

MESH & NETTING

• RETAIL PACKING


STANDARD SIZE	STANDARD COLOR	STANDARD WIDTH	LENGHT	PACKING
18X16	BLACK, GRAY,	24",36",48",60",72"	7'	16 ROLLS/CARTON
			25'	9 ROLLS/CARTON
18X14	WHITE	0.6M,0.8M,1.0M, 1.2M,1.5M	1.5M	24 ROLLS/CARTON
			3.0M	16 ROLLS/CARTON



- STRONGER CARDBOARD TUBE INSIDE, WITH COLOR LABEL AND PLASTIC BAG, THEN PUT INTO CARTON.



- OTHER SIZE AND COLOR MAYBE AVAILABLE BY CUSTOMER REQUEST.
- WE ALSO CAN SUPPLY OTHER DIFFERENT WIDTH AND LENGTH AS PER YOUR REQUIREMENTS!

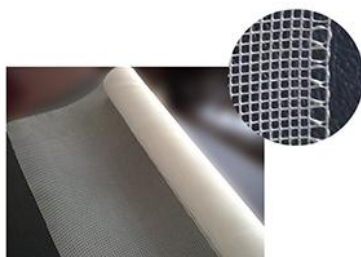

- **FIBERGLASS LENO INSECT SCREEN:** IT IS MADE OF GLASS FIBER BY LENO WEAVING, PVC PLASTIC COATING PROCESS IN DIFFERENT COLORS. QUALITY IS NOT AS HIGH AS PLAIN WEAVING. ONLY FOR COMMERCIAL PURPOSE.

SPECIFICATIONS

STANDARD SIZE	STANDARD COLOR	STANDARD WIDTH	STANDARD LENGTH
14X14	BLACK, GRAY, WHITE, GREEN, BLUE	2', 3', 4', 5'	25', 50', 100'
		0.6M, 0.8M, 1.0M, 1.2M, 1.5M	25M, 30M

- OTHER SIZE AND COLOR MAYBE AVAILABLE BY CUSTOMER REQUEST.
- WE ALSO SUPPLY OTHER DIFFERENT WIDTH, LENGTH AND COLOR AS PER YOUR NEED!
- STANDARD PACKING: 10 ROLLS/CARTON OR 10 ROLLS/SACK



STAINLESS STEEL WINDOW SCREEN



- THE INITIAL COST OF STAINLESS STEEL INSECT SCREENING IS SIGNIFICANTLY HIGHER THAN ALUMINUM. THE LONG TERM LIFE EXPECTANCY OF STAINLESS STEEL SCREENS IS WORTHY OF THE INVESTMENT. THIS SPECIFICATION GROUP IS THE MOST DURABLE SCREENING AVAILABLE.
- IT IS AVAILABLE IN T-304 AND T-316. THE MATERIAL IS EXTREMELY DURABLE AND WILL NOT RUST IN MOST ENVIRONMENTS.

WIRES PER LINEAR INCH	INSECT SCREEN OPENING		WIRE DIAMETER		OPEN AREA
	INCHES	M.M.	INCHES	M.M.	
18 X 18 MESH	0.0465"	1.18	0.009"	0.228	70.2%
18 X 16 MESH	0.0465" X 0.0535"	1.18 X 1.35	0.009"	0.228	71.73%
18 X 14 MESH	0.0445" X 0.0604"	1.13 X 1.53	0.011"	0.279	67.8%
12 X 12 MESH	0.065"	1.18	0.018"	0.457	61.4%
14 X 14 MESH	0.054"	1.37	0.017"	0.432	58.1%
16 X 16 MESH	0.0465"	1.18	0.016"	0.406	55.4%

OTHER SPECIFICATIONS:

STANDARD SIZE	WIRE GAUGE	ROLL SIZE
20X20	BWG38	3"X100'
22X22	BWG37	4"X100'
25X25	BWG36	1X25M
	BWG35	1.2X25M
	BWG34	



- PACKING: IN ROLLS, THEN PACKED IN CARTON, SPECIAL PACKING MAYBE ARRANGED UPON REQUEST
- REMARK: OTHER SIZE MAYBE MADE TO ORDER AFTER CONSIDERATION.




GABIONS AND MATTRESS

DECO-GABIONS

- GABIONS ARE STONE FILLED WIRE CAGES,WHICH ARE USED IN LANDSCAPING AS A RETAINING WALL TO RETAIN OR PROTECT SLOPES FROM EROSION E.G. ALONG RIVER BANKS.THIS NEW GABIONS MADE OF WELDED MESH PANELS ARE EASY FOR ASSEMBLING AND IS IDEALLY USED AS DECORATION WALLS IN THE GARDENS. ONE COMPARTMENT SET INCLUDES 6PCS MESH SHEET AND 12PCS SPIRALS, ADDITIONAL STRENGTHENING WIRE HOOKS ARE INCLUDED FOR BIG SIZES.
- MESH SIZES AVAILABLE:50MM,75MM,100MM

LENGTH(CM)	WIDTH(CM)	HEIGHT(CM)
30	30	30
60	30	30
45	45	45
60	45	45
60	60	60
90	60	60
50	50	50
100	50	50
150	50	50
200	50	50

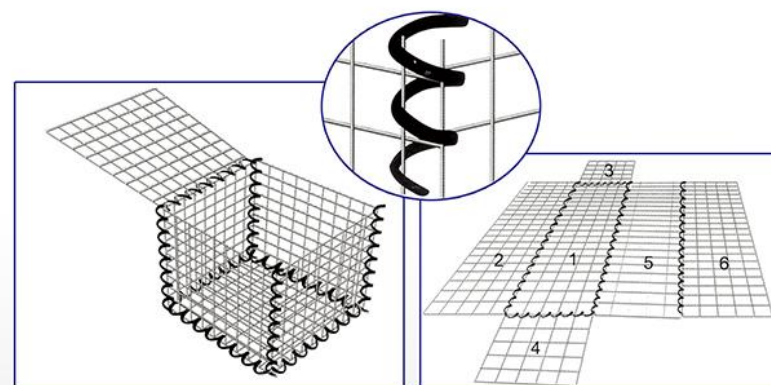


GABIONS

- GABIONS IS A NEWLY PRODUCED HEXAGONAL IRON WIRE NETTING WITH DOUBLE-TWIST WEAVING AND THICK WIRE GAUGE. BECAUSE OF ITS STRENGTH AND FLEXIBILITY, THIS NET HAS BEEN OFTEN USED TO PREVENT ROCKS AND DEBRIS ALONG RAILWAYS. THIS SOLUTION CAN ALSO HELP TO ESTABLISH VEGETATION. THE GABIONS AND MATTRESSES MADE WITH THIS NET ARE WIDELY USED SUCH AS RIVER TRAINING, LINING OF STEEP SLOPES, LINING OF CANALS AND DAMS, BRIDGE PILLARS PROTECTION ETC.
- MESH AVAILABLE: 100MM X 80MM, 80X60MM, 120MM X 100MM.
- WIRE AVAILABLE: HEAVY GALVANIZED WIRE, PVC COATED WIRE

UNIT SIZE LENGTHXWIDTHXHEIGHT	NO.OF DIAPHRAGM
1.0M X 1.0M X 1.0M	0
1.5M X 1.0M X 0.5M	0
1.5M X 1.0M X 1.0M	0
2.0M X 0.5M X 0.5M	1
2.0M X 1.0M X 0.3M	1
2.0M X 1.0M X 0.5M	1
2.0M X 1.0M X 1.0M	1
3.0M X 1.0M X 0.5M	2
3.0M X 1.0M X 1.0M	2

WIRE DIAMETER


HEAVY GALVANIZED WIRE: 2.2MM, 2.7MM, 3.0MM, 3.4MM, 3.9MM
PVC COATED WIRE: 2.0/3.0MM, 2.5/3.5MM, 3.0/4.0MM
GALFAN WIRE: 2.2MM, 2.7MM, 3.0MM



MATTRESS

- IN 25M ROLLS OR 50M ROLLS WITH WIDTH UP TO 4M
- WIRE AVAILABLE
GALFAN WIRE
HEAVY GALVANIZED WIRE
PVC COATED WIRE

UNIT SIZE LENGTHXWIDTHXHEIGHT	NO.OF DIAPHRAGM
3.0M X 2.0M X 0.3M	2
4.0M X 2.0M X 0.3M	3
5.0M X 2.0M X 0.3M	4
6.0M X 2.0M X 0.3M	5

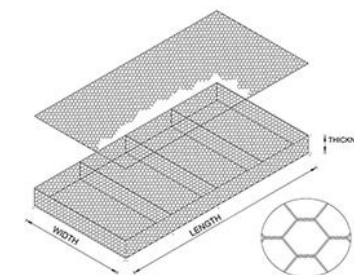

ROCK FALL

- WIRE AVAILABLE
HEAVY GALVANIZED OR GALFAN COATED WIRE
2.00MM, 2.20MM, 2.40MM, 2.70MM, 3.00MM
PVC COATED ON HEAVILY GALVANIZED OR GALFAN COATED WIRE
2.0/3.0MM, 2.2/3.2MM, 2.4/3.4, 2.7/3.7MM,

LENGTHXWIDTH
1X25M
1X50M
2X25M
2X50M
3X25M
3X50M



GABIONS BAG

- MESH AVAILABLE
8X10CM
6X8CM

- L=LENGTH
D=DIAMETER

L(M)	D(M)
1.8	0.6
2.7	0.6
1.8	0.9
2.7	0.9

- WIRE AVAILABLE
GALFAN WIRE
HEAVY GALVANIZED WIRE
PVC COATED WIRE






WIRE

JUMBO COIL WIRE

- BIG COILED WIRE IS WIDELY USED FOR CONSTRUCTION, WEAVING WIRE MESH
- PACKING: 500KGS-800KGS PER COIL
- DIAMETER: ID 45-50CM, OD 70-75CM
- STANDARD: COULD BE MADE ACCORDING TO EN OR ASTM OR AT CUSTOMERS' REQUIREMENTS.
- PVC COATED WIRE IS AVAILABLE
- GALFAN WIRE (5% AL AND 95%ZN) IS AVAILABLE.



WIRE DIAMETER MM	TENSILE STRENGTH N/MM2	LIGHT ZINC GAL. G/M2	HEAVY ZINC GAL. G/M2
1.2	450-520	50-70	180-230
1.6	450-520	50-70	195-230
1.7	450-520	50-70	195-230
1.8	400-550	50-75	210-280
1.9	400-550	50-80	210-280
2.0	400-550	50-85	210-280
2.1	400-550	50-85	230-366
2.2	400-550	50-85	230-366
2.3	400-550	50-85	230-366
2.4	400-600	55-85	230-366
2.5	400-600	55-85	230-366
2.6	400-600	55-95	230-366
2.7	400-600	55-95	230-366
2.8	400-600	55-95	230-366
2.9	400-600	55-95	230-366
3.0	400-600	55-95	230-366
3.5	400-600	60-105	230-366
3.8	400-600	50-110	230-366
4.0	400-600	50-110	230-366
4.3	400-600	50-110	230-366
4.5	400-600	50-110	230-366
4.8	400-600	50-110	230-366
5.0	400-600	50-110	230-366
5.3	400-600	50-110	230-366
5.5	400-600	50-110	230-366
6.0	400-600	50-110	230-366



OVAL GALVANIZED WIRE

- THE GALVANIZED OVAL WIRE IS USED FOR CATTLE FARM CONSTRUCTION IN HIGH TENSILE,OR NORMAL TENSILE.

CABLE	DIMENSION (MM)	METERS PER ROLL (M)
14/12	2.20X1.80	1.800
15/13	2.40X2.00	1.500
16/14	2.70X2.20	1.250
17/15	3.00X2.40	1.000
18/16	3.40X2.70	800



- THE ZINC COATING WE CAN SUPPLY
60G/M2 OR 240G/M2

WOODEN REEL WIRE

- IT'S MADE OF HIGH
TENSILE HEAVY
GALVANIZED WIRE



- TENSILE STRENGTH : 1400-1500MPA, ZINC COATING : 240G/M2
14G X 100Lbs
12G X 100Lbs
- OTHER SIZE AND SPECIFICATION WE CAN MAKE BY CUSTOMERS' REQUEST

COIL WIRE

ASSORTMENTS	SIZE	T/S (KGS/MM2)
ELECTRO-GALVANIZED	BWG6-BWG32	30-55
HOT DIPPED GALVANIZED		
BLACK ANNEALED WIRE		

PVC COATED WIRE		
ASSORTMENTS	COLOR	T/S (KGS/MM2)
CORE WIRE DIA 0.5-4MM OUTER DIA 1.0-5MM	DARK GREEN,	30-55
	FRESH GREEN	
	BLACK AND WHITE,ETC	

- PACKING:
IN 10-200KGS COIL LINED WITH WAX PAPER OR PVC STRIPES AND
WRAPPED WITH HESSIAN CLOTH OR NYLON CLOTH.



STRAIGHT CUT WIRE

- CAN BE AVAILABLE IN GALVANIZED AND ANNEALED,IN VARIOUS LENGTH

SIZE	T/S (KGS/M M 2)	MAX.LENGTH
BWG 4-BWG22	30-55	19FT.

- PACKING:
IN BUNDLES OR IN CARTONS
AVAILABLE IN GALVANIZED OR ANNEALED IRON WIRE



TWISTED WIRE

- IT IS MADE OF BLACK ANNEALED WIRE BY TWO TWISTED OR SIX TWISTED. WILDLY USED IN CONSTRUCTION.
- 1.1MMx6, 25KG/COIL
- 1.1MMx7, 25KG/COIL
- WE ALSO CAN SUPPLY OTHER TWISTED WIRES AS CUSTOMERS' REQUEST.



SMALL COIL BLACK WIRE

- SINGLE WIRE
- 1KG/COIL, 20KG/CTN
- DOUBLE WIRE
- 1.2MMx2, 1KG/COIL, 20COILS/CTN



U TYPE WIRE



BAR TIES

- DESCRIPTION:
BAR TIES, ALSO NAMED AS ROD TIES, ARE PRODUCED IN A FULL RANGE OF BLACK ANNEALED, GALVANIZED AND PLASTIC COATED WIRES.

SIZE (MM)	WT. PER BDL. (KG)	STANDARD PACK	PALLET QTY.
110	5.9	5	148
125	6.4	5	128
150	7.1	4	112
175	7.8	3	96
200	8.63	3	80
250	10.5	2	64
300	11.7	2	48
350	13.12	2	48



- RANGE:
ABOVE BAR TIES ARE MADE FROM 1.57 MM DIAMETER WIRE. OTHER DIA. AVAILABLE UPON REQUEST.
- FINISH:
BLACK ANNEALED, GALVANIZED AND PLASTIC COATED WIRE.
- PACKING:
THE STANDARD PACK IS A BUNDLE OF 2000 PCS, AND THE POPULAR SIZES OF 110, 125 AND 150MM BAR TIES ARE ALSO AVAILABLE IN SMALL PACKS OF 200PCS. OTHER PACKING CAN BE SUPPLIED AS PER CUSTOMERS' REQUIREMENT.

WALL SPIKE

- AVAILABLE MATERIAL:
HOT-DIP GALVANIZED STEEL SHEET.
STAINLESS STEEL AISI430 OR AISI304.
- SPECIFICATION OF WALL SPIKE:
SPIKE LENGTH: 64MM-100MM
SPIKE THICKNESS: 0.8MM-2.0MM.
LENGTH PER PIECE: 0.5M, 1M, 1.5M, 1.8M
- OTHER SIZE MAYBE PRODUCED BY CUSTOMERS' REQUEST



TIE WIRE COILS

- ANNEALED BELT PACK IS USED IN THE BUILDING INDUSTRY FOR STEEL FIXING


SPECIFICATION	COIL WEIGHT	PACKING	QUANTITY/20'
ASW16	3.5LB	20COILS/CARTON, 24CTN/PALLET, 27PALLET/20'	20.59MTS
1.57MM	1.42KG	10COILS/CARTON, 64CARTON/PALLET, 24PALLET/20'	21.81MTS



RAZOR WIRE(CONCERTINA WIRE)

- RAZOR WIRE IS A TYPE OF FENCING USUALLY USED IN SECURITY APPLICATIONS, OR TO PREVENT EXTREMELY STUBBORN FROM ESCAPING. IT IS SIMILAR TO BARBED WIRE IN CONSTRUCTION, BUT FEATURES SHARP RAZOR LIKE SHAPES CUT FROM STEEL TAPE.



REFERENCE NUMBER	BLADE STYLE	THICKNESS	WIRE DIA	BLADE LENGTH	BLADE WIDTH	BLADE SPACING
BTO-15		0.5±0.05	2.5±0.1	15±1	15±1	33±1
BTO-22		0.5±0.05	2.5±0.1	22±1	22±1	34±1
BTO-30		0.5±0.05	2.5±0.1	30±1	18±1	46±1
CBT-60		0.6±0.05	2.5±0.1	60±2	21±1	100±2
CBT-65		0.6±0.05	2.5±0.1	65±2	21±1	100±2

COIL DIAMETER	NO.OF LOOPS	STANDARD LENGTH PER COIL	TYPE	NOTES
450MM	33	7-8M	CBT-60.65	SINGLE COIL
500MM	41	9-10M	CBT-60.65	SINGLE COIL
500MM	56	12-13M	CBT-60.65	SINGLE COIL
700MM	56	13-14M	CBT-60.65	SINGLE COIL
450MM	56	8-9M(3 CLIPS)	BTO-15.22. 30	CROSS TYPE
500MM	56	9-10M (3 CLIPS)	BTO-15.22. 30	CROSS TYPE
600MM	56	10-11M(3 CLIPS)	BTO-15.22. 30	CROSS TYPE
700MM	56	10-12M (5 CLIPS)	BTO-15.22. 30	CROSS TYPE
900MM	56	12-14M (5 CLIPS)	BTO-15.22. 30	CROSS TYPE
960MM	56	13-15M (5 CLIPS)	BTO-15.22. 30	CROSS TYPE
980MM	56	14-16M (5 CLIPS)	BTO-15.22. 30	CROSS TYPE

- THE LENGTH AND WIRE DIAMETER CAN BE MADE ACCORDING TO CUSTOMERS' REQUEST.
- CORE WIRE MATERIAL: GALVANIZED WIRE AND STAINLESS STEEL WIRE.
- BLADE MATERIAL: GALVANIZED SHEET AND STAINLESS STEEL PLATE.
- PACKING: CARTON OR WATER PROOF PAPER PACK



FLAT RAZOR WIRE



RAZOR WIRE FENCE

BARBED WIRE

- WIRE MATERIALS: GALVANIZED STEEL WIRE, PVC COATED WIRE.
- GENERAL USE: BARBED WIRE IS MAINLY USED IN PROTECTING GRASS BOUNDARY, RAILWAY, AND HIGHWAY, ETC.



IOWA TYPE



MOTTO TYPE



TYPE	WIRE GAUGE		BARB DISTANCE	BARB LENGTH
ELECTRO GALVANIZED HOT-DIP GALVANIZED	BWG10 X BWG12		7.5-15CM	1.5-3CM
	BWG12 X BWG12			
	BWG12 X BWG14			
	BWG14 X BWG14			
	BWG14 X BWG16			
	BWG16 X BWG16			
	BWG16 X BWG18			
	BWG17 X BWG17			
PVC COATED	BEFORE COATED	AFTER COATED	7.5-15CM	1.5-3CM
PE COATED	1.0MM-3.5MM	1.4MM-4.0MM		
	BWG11-20	BWG8-17		


PVC PE COATING THICKNESS: 0.4MM-0.6MM;

DIFFERENT COLORS OR LENGTH ARE AVAILABLE AT CUSTOMERS' REQUEST.

- PACKING: BULK OR ON PALLET
- THE OTHER SIZE MAY BE AVAILABLE BY CUSTOMERS' REQUEST.

FENCE FIX TWIST WIRE

- IT'S MADE OF TWO HOT DIP GALVANIZED WIRE, TO FIX THE FENCE WIRE, STRENGTHEN THE STABILITY OF HORIZON WIRE
- 3.40MMX2,1.20M LENGTH, 100PCS PER BUNDLE 18.80KG

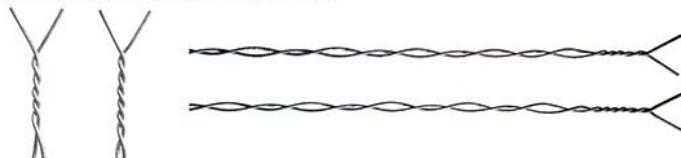

Y ARM

- FOR SECURITY SYSTEM, INSTALL THE CHAIN LINK FENCE AND PANEL FENCE, TOP OF POST TO INSTALL THE BARB WIRE AND RAZOR WIRE.




WELDING WIRE

- CO2 GAS SHIELDED WELDING WIRE AND WELDING ELECTRODE
- MODEL SERIES:
ER70S-6,ER70S-4,ER80S,ER90S,ER100S
- SPECIFICATION:
Φ0.8MM,Φ0.9MM,Φ1.0MM,Φ1.2MM,Φ1.6MM,Φ2.0MM
- CHEMICAL COMPONENTS OF SOLDER WIRE(%):

C	Mn	Si	S	P	Cu
0.06-0.15	1.40-1.85	0.80-1.15	≤0.035	≤0.025	≤0.50

- MECHANICAL PROPERTIES OF DEPOSITED METAL:
TENSILE STRENGTH (MPA)≥500
YIELD STRENGTH (MPA)≥420
ELONGATION (%)≥22
IMPACT V-NOTCH AKV(-29C.J)≥27
- APPLICATION:
AWS ER70S-6 SOLDER WIRE IS SUITABLE FOR CO2 SHIELDED WELDING OF LOW CARBON STEEL AND LOW ALLOY STEEL, PARTICULARLY IT IS SUITABLE FOR WELDING ROLLING STOCK, CONTAINER,ENGINEERING,AND PRESSURE CONTAINER,ETC.
- PACKING:SHRINK THE PVC AND THEN PUT INTO CARTON

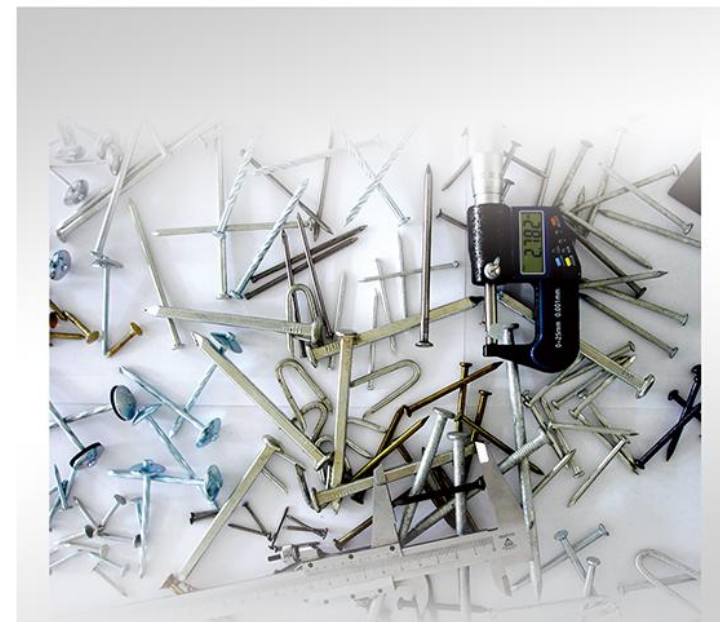

NAILS

COMMON NAIL



- MOST POPULAR NAIL AND VERSATILE STYLE.
- FOR CONSTRUCTION, CARPENTRY AND FARMING.
- LARGER SHANK PROVIDES GREATER RESISTANCE TO BENDING

LENGTH (MM)	GAUGE (MM)	INCHXGAUGE
20	1.6	3/4X16
25	1.6	1X16
25	1.8	1X15
25	2	1X14
30	2	1-1/4X14
40	2.36	1-1/2X13
40	2.65	1-1/2X12
45	2	1-3/4X14
45	2.36	1-3/4X13
50	2.36	2X13
50	2.65	2X12
50	3	2X11
50	3.35	2X10
60	2.65	2-1/4X12
60	3.35	2-1/4X10
65	2.65	2-1/2X12
65	3	2-1/2X11
65	3.35	2-1/2X10
75	3	3X11
75	3.35	3X10
75	3.75	3X9
75	4	3X8
90	3.35	3-1/2X10
90	4	3-1/2X8
100	3.75	4X9
100	4	4X8
100	4.5	4X7
100	5	4X6
125	5	5X6
125	5.6	5X5
150	6	6X4



CONCRETE NAIL



- STURDY SLIM SHANK
- FOR ATTACHING THIN SIDE WALL SHINGLES, LARGE, FLAT HEAD DRIVES EASILY. STURDY SLIM SHANK PREVENT SPLITTING.

LENGTH (MM)	GAUGE (MM)	INCHXGAUGE
25	3	1X11
40	3.35	1-1/2X10
50	3.35	2X10
65	3.75	2-1/2X9
75	4	3X8
100	4.5	4X7

DUPLEX NAIL



- FOR TEMPORARY CONSTRUCTION SHEER NAIL REMOVAL IS REQUIRED, SUCH AS CONCRETE FORMING AND SCAFFOLDINGS.
- SMOOTH, UNCOATED SHANK AND DOUBLE HEAD EASY REMOVAL (SECOND HEAD REMAINS EXPOSED)

LENGTH (MM)	GAUGE (MM)	INCHXGAUGE
50	2.65	2X12
65	3	2-1/2X11
75	3.75	3X9
100	4.5	4X7



UMBRELLA HEAD ROOFING NAIL



- SHANK TWISTED OR PLAIN
- FOR ROOFING PANELS AND FLAT CORRUGATED SHEETS. TWISTED SHANK FOR HOLDING POWER IN HIGH WIND AREAS AND SOFTWOODS.



LENGTH (MM)	GAUGE (MM)	INCHXGAUGE
40	2.36	1-1/2X13
45	2.36	1-3/4X13
50	2.36	2X13
40	2.65	1-1/2X12
45	2.65	1-3/4X12
50	2.65	2X12
40	3	1-1/2X11
45	3	1-3/4X11
50	3	2X11
65	3	2-1/2X11
45	3.35	1-3/4X10
50	3.35	2X10
65	3.35	2-1/2X10
40	3.75	1-1/2X9
50	3.75	2X9
65	3.75	2-1/2X9
75	3.75	3X9
50	4	2X8
65	4	2-1/2X8
70	4	3X8

FENCE STAPLE



- GENERALLY USED FOR ATTACHING WOVEN WIRE FENCE, WELDED FENCE AND BARBED TO WOODEN FENCE POSTS. ATTACHING POULTRY NET FENCING TO WOOD.

LENGTH (MM)	GAUGE (MM)	INCHXGAUGE
15	1.6	5/8X16
20	2	3/4X14
20	2.65	3/4X12
25	2.65	1X12
30	3.75	1-1/4X9
30	4	1-1/4X8
40	4	1-1/2X8
50	4	2X8
50	5	2X6

CLOUTS NAIL



- FOR APPLYING ROOF ASPHALT SHINGLES, INSULATION BOARD, AND FELT-TO-WOOD SUBSTRATES.
- LARGER HEADS AND HEAVIER SHANKS GAUGE PROVIDE GREATER HOLDING POWER.

LENGTH (MM)	GAUGE (MM)	INCHXGAUGE
20	2.65	3/4X12
25	2.65	1X12
30	2.65	1-1/4X12
40	2.65	1-1/2X12
50	2.65	2X12
60	2.65	2-1/4X12
65	2.65	2-1/2X12
40	3.35	1-1/2X10

SQUARE BOAT NAIL



- SPECIALLY DESIGNED FOR DECKING AND LANDSCAPING USE.

LENGTH (MM)	GAUGE (MM)	INCHXGAUGE
25	4	1X8
50	4	2X8
65	4	2-1/2X8
75	4	3X8
90	6	3-1/2X4
100	6	4X4
125	6	5X4
150	6	6X4

FLAT HEAD SPIRAL NAIL



- TWISTED SHANK
- FOR PATIO AND DECK CONSTRUCTION.

LENGTH (MM)	GAUGE (MM)	INCHXGAUGE
50	3	2X11
65	3	2-1/2X11
75	3.35	3X10
80	3.75	3-1/4X9
90	3.35	3-1/2X10
100	4.5	4X7
125	4.5	5X7
150	5.6	6X5

CUT MASONRY NAIL



- FOR ATTACHING WOOD TO CINDER BLOCK, MORTAR JOINTS, BRICK WALLS AND FRESH CONCRETE. BLUNT POINT AND TAPERED SHANK REDUCE SPLITTING.

CODE	INCHES
4D	1-1/2
6D	2
8D	2-1/2
10D	3
16D	3-1/2
20D	4

NODULATED SHANK CONCRETE NAIL



- FLOUTED SHANKS GIVE GREATER LATERAL HOLDING POWER IN CONCRETE.

LENGTH (MM)	GAUGE (MM)	INCHXGAUGE
60	3.75	2-1/4X9
75	3.75	3X9
75	4	3X8
90	4	3-1/2X8
100	4	4X8

GROUND STAPLE

- THE MATERIAL AVAILABLE: GALVANIZED HARD WIRE
POLISH HARD WIRE
- SPECIFICATION: 6" X 1" X 6".
5" X 1" X 5".
9" X 1" X 9".
- THE PACKING: 200 PCS/CTN, 500PCS/CTN, 1000PCS/CTN
- WE ALSO CAN PRODUCE THE PACKING AND OTHER SIZE AS CUSTOMERS' REQUEST.





CONSTRUCTION PRODUCTS

REINFORCING MESH



• WELDED MESH FABRIC REINFORCEMENT STANDARD FABRICS

	MESH SIZE PITCH OF WIRE		WIRE SIZES		SUPPLIED IN
	MAIN	CROSS	MAIN	CROSS	
	MM	MM	MM	MM	
SQUARE MESH FABRIC	200	200	10	10	SHEETS ONLY 6M X 2.4M
	200	200	9	9	
	200	200	8	8	
	200	200	7.1	7.1	
	200	200	6.3	6.3	SHEETS OR ROLLS
	200	200	5.6	5.6	
DESIGN MESH FABRIC	100	200	12	8	SHEETS ONLY 6M X 2.4M
	100	200	11	8	
	100	200	10	7.1	
	100	200	9	7.1	
	100	200	8	6.3	
	100	200	7.1	6.3	
	100	200	6.3	5.6	
	100	200	5.6	5.6	
LONGITUDINAL MESH FABRIC	100	300	6.3	4	SHEETS ONLY 6M X 2.4M
	100	300	5.6	4	
	100	300	4	4	SHEETS OR ROLLS
SPECIAL MESH	100	100	4	4	
	100	100	3.55	3.55	60M X 2.4M

• OTHER SIZE CAN BE AVAILABLE ACCORDING TO CUSTOMERS' REQUEST

BRICK MESH

- EXPANDED BRICK MESH
USED PRIMARILY AS ANTI-CRACKING REINFORCEMENT
IN THE CONSTRUCTION OF BRICK AND BLOCK MASONRY.

WIDTH	LENGTH	THICKNESS
64MM	20M	0.45MM
114MM	20M	0.45MM
178MM	20M	0.45MM
229MM	20M	0.45MM
305MM	20M	0.45MM



- WELDED BRICK MESH
IT IS A SPECIAL GALVANIZED TYPE OF WELDED MESH
USED AS REINFORCEMENT IN BRICKING LAYING

MESH	WIDTH	LENGTH
23X45MM	70MM	46M
23X45MM	90MM	46M
23X45MM	160MM	46M



- BRICKNET
IT IS ANOTHER SPECIAL GALVANIZED HEXAGONAL NETTING
THAT IS USED AS REINFORCEMENT IN BRICK LAYING.
HOT DIPPED GALVANIZED AFTER WEAVING
70MM WIDTH WITH 45.7 METERS ROLL.






BAR CHAIRS

- BAR CHAIRS-AU





- SLAB BOLSTER




FIBER GLASS CORNER MESH

- CORNER MESH WITH PVC PROFILE:
THIS PRODUCT IS PVC PROFILE BONDED WITH
FIBERGLASS MESH FOR CORNER REINFORCEMENT,
WHICH IS USED WIDELY FOR EIFS AND DRYWALL
SYSTEM
- MESH SIZE : 5X5MM/130G-135G/M2
WIDTH OF THE MESH: 10MM X10MM; 15MMX15MM
LENGTH OF THE PVC PROFILE: 2.5M



ALKALI-RESISTANCE NET

- ALKALINE RESISTANT FIBERGLASS MESH IS WOVEN BY FIBERGLASS YARN, AND THEN COATED BY ALKALINE RESISTANT GLUE. IT HAS FINE ALKALINE RESISTANCE, HIGH STRENGTH, ETC. AS AN IDEAL ENGINEERING MATERIAL IN CONSTRUCTION, IT IS MAINLY USED TO REINFORCEMENT, STONE, WALL MATERIALS, ROOFING, BITUMEN, GYPSUM, WATERPROOF AND SO ON.
- INNER PACKING: SHRINKAGE PACKING ONE ROLL, THEN 30 TO 52 ROLLS/PALLET OR 4 ROLLS/CARTON
- COLOR AVAILABLE: WHITE, ORANGE, BLUE, GREEN, YELLOW.



MESH(MM)	WEIGHT PER M ² (GRAMS)
2.5X2.5	60G, 125G, 150G
4X4	75G, 90G, 110G, 125G, 145G, 160G
5X5	75G, 90G, 110G, 125G, 145G, 160G
6X5	75G, 125G, 145G, 160G
6X6	125G, 145G, 160G
8X8	60G, 110G, 125G, 145G
10X10	125G, 145G, 160G

MEMO

SELF ADHESIVE FIBERGLASS NET TAPE

- SELF-ADHESIVE FIBERGLASS TAPE, DRYWALL JOINT TAPE, FIBERGLASS TAPE, FIBERGLASS MESH TAPE IS WOVEN BY FIBERGLASS BULK YARN, THEN COATED WITH ALKALINE RESISTANT GLUE AND ADHESIVE GLUE. THEN CUT INTO DIFFERENT SIZE. THIS TAPE IS VERY STRONG SELF-ADHESIVE AND USED IN VARIOUS CONSTRUCTION APPLICATIONS. THESE INCLUDE REINFORCING WALL CRACKS, BOARD CRACKS, PLASTERBOARD CRACKS AND MARBLE CEMENT; IN ADDITION TO REPAIRING DRYWALL JOINTS.
- SPECIFICATIONS:



MESH	WIDTHXLENGTH	COLOR
2.85X2.85MM (9X9MESH)	50MMX90M	WHITE, YELLOW,
3.2X3.2MM (8X8MESH)	50MMX45M	GREY, SILVER,
	50MMX20M	BLUE



- ANY DEMAND LENGTH IS AVAILABLE, OR ACCORDING TO CLIENTS' REQUIREMENTS
- PACKING: INNER PACKING: SHRINK PACKING OR PLASTIC BAG, OUTER PACKING: 24 ROLLS OR 54 ROLLS OR 72 ROLLS/CARTON OR PALLET PACKING